

Kentmaster

Product Catalog
Carcass Cutting Tools for
The Meat Packing Industry



Tel (956) 369-0129

Email: ventas@marekpartssupply.com

Web: marekpartssupply.com



Kentmaster Mfg. Co., Inc.

Kentmaster Mfg. Co., Inc. was established in the year 1948 by Charles Steiner, who had spent many years working as a design engineer in the aircraft industry. Using his engineering skills, he designed and manufactured electric and pneumatic carcass cutting tools for use in the meat industry domestically and abroad.

He was instrumental in designing a number of tools for the meat industry, which contributed to the dramatic increase in production rates of the modern kill floors of the early years. Among them was the invention of the "cleaver action" carcass splitting machine for which he was granted a U.S. Patent. Steiner was succeeded by his son-in-law, Ralph Karubian, who took over management of the company in 1967.

Throughout the years Kentmaster has grown and expanded and is proud to be among the world's leading manufacturers of machinery and cutting tools for the meat industry.

Today, the company's corporate office and main manufacturing plant is located in a modern 50,000 square foot facility in the city of Monrovia, California. Kentmaster is dedicated to designing and manufacturing the finest quality machinery for the meat industry.

A second Kentmaster facility is located in Omaha, Nebraska and manufactures specialized machinery for the meat industry such as vacuum sanitizing "Vac-San" machines, offal cleaning machines, beef and pork head processing machines, and a variety of other special purpose machinery. Kentmaster field service engineers based in Omaha, Nebraska providing sales and service to plants throughout the country.

Kentmaster operates branches overseas providing sales and service to plants located in Australia, New Zealand, Brazil, England, Ireland, and South Africa. In addition, Kentmaster products are marketed and distributed through importers, agents, and distributors in many other countries throughout the world. Kentmaster personnel are dedicated to providing the finest quality products and service to the meat industry.



Index

BEEF

Drive Ally

Electric Coaxer (Prodder) - KKAWE _____ 34

Stunning

Bolt Stunner with Cartridges - ST-GUN _____ 34

Pneumatic Bolt Stunner - PBS-1 _____ 35

Bleeding

Bleeding and Sticking Knife (Beef) - SBN-1 _____ 35

Stimulating

Electric Stimulator - KEST-2 _____ 36

Cleaning

Roto Hide Cleaner - ARHC-1 _____ 7

Oesophagus

Beef K-Clip with Rodder - CLIP-B _____ 36

Horn and Hock

Beef Horn Shear - HC-I _____ 7 Beef Horn Shear -

HC-II _____ 8 Beef Horn

Shear - HCC-II _____ 8 Beef

Dehorner - AD _____ 9

Hock and Horn Cutter - HC-7 _____ 9 Beef Hock Cutter - HC-III

_____ 10 Beef Leg Cut-off Saw -

AL _____ 10 Air Hock Cutter -

AHC-I _____ 11 Hock Cutter -

_____ 11

Dehiding

Air Dehider - TURBO-III _____ 12 Dehider Blade

Sharpener and Conditioner - Quick-Set _____ 12

Breastbone

Beef Brisket Saw - 500E _____ 13 Beef Brisket Saw -

EBB-II _____ 13 Beef Brisket

Saw - ABB-II _____ 14 Beef

Brisket Saw - HBB-II _____ 15

Beef Brisket Saw - _____ 153

Splitting

Beef Splitting Saw - _____ 75

_____ 15 Beef Splitting Saw -

151 _____ 16 Beef Splitting Saw

- 203 _____ 16 Bull Splitting

Saw - BM-V-SB _____ 17 Beef

Splitting Saw - BM-V-S _____ 17 Beef

Splitting Saw - BM-V-SD _____ 18 Beef

Splitting Saw - BM-V-SDB _____ 18

Quartering

Loin Dropper - Horizontal Band Saw - BM-V-LB _____ 19

Loin Dropper - HC-VI _____ 19

Neck and Head Processing

Beef Head Dropper - HC-V _____ 20 Tongue Bone Cutter - M-

2 _____ 20 Beef Head Table -

Chisel and Jawbone Puller - BHT-I _____ 21

BEEF

Offal Processing

Automatic Intestine Cutter - AIC-I _____ 21 Tripe Washer and Refiner - TG-

32, TG-48 _____ 22 Automatic Intestine Splitter

and Cleaner - AISC-I _____ 23

Vacuum

Carcass Cleaning System - VAC-SAN _____ 24

Spinal Cord Remover - KVS-I _____ 25 Brain/Spinal Cord Vacuum

_____ 25 Multiple Drop Vacuum

System _____ 25

Breaking

Multi Purpose Bone Saw - _____ 77

_____ 26 Primal Beef Breaking Saw -

Super Speed _____ 26 Beef Scribe Saw - SC-400

_____ 27 Pork Scribe Saw - SC-550

_____ 27 Breaking Saw, Rib Bone -

SC-650 _____ 28 Breaking Saw, Rib Bone -

HSC-650 _____ 28 Breaking Saw - Chine,

Loins, Short Ribs - HSC-800 _____ 29 Air Circular Breaking Saw

- SL-1100 _____ 29 Air Horizontal Breaking

Saw - SL-1100-C _____ 30 Electric Circular Breaking

Saw - COLT _____ 30 Electric Horizontal

Breaking Saw - CHINE _____ 31 Hydraulic Circular

Breaking Saw - HKM-I _____ 31 Hydraulic Circular

Breaking Saw - HKM-III _____ 32 Hydraulic

Horizontal Breaking Saw - HKM-IV _____ 32

Reciprocating Breaking Saw - ZIP SAW _____ 33

Reciprocating Breaking Saw - K-9 _____ 33

ACCESSORIES

Power Units

Hydro Power Pack, 10HP - HPP-I _____ 77

Hydro Power Pack, 5HP - HPP-II _____ 77

Hydro Power Pack, 3HP - HPP-III _____ 78

Booster, Air Over Oil - B-1, B-2 _____ 78

Intensifier, Air Over Oil - HP-I, HP-II _____ 79

Electrical

Magnetic Starter _____ 79 Inverter,

Electronic Brake _____ 79

Transformers _____

Blades, Hoses, Air lines, Balancers

Air In-Line Heater _____ 80

Air Filter, Regulator, Oiler _____ 80

Service _____ 80

Circular Blades _____ 81

Reciprocating Blades _____ 81

Dehider Blades _____ 81

Bandsaw Blades _____ 81

Vacuum Hoses _____ 82

Air Hoses _____ 82

Hydraulic Hoses _____ 82

Water Hoses _____ 82

Balancers _____ 83



Index

Call

PORK

Stunning

Electric Stunner (Constant Amperage) – KCS-1	60
Electric Stunner (Constant Voltage) – KEC-21	60
Electric Stunner (Constant Voltage) – KLC-1	61
Forks, Tongs, Head to Back	61

Bleeding

Bleeding and Sticking Knife (Pork) – SBN-2	62
--	----

Dehairing

Dehairing Beaters – DHB-1	62
---------------------------	----

Hock

Hock Cutter – M-1	39
– AHC-I	39
Notcher – MT-40	40
Toe Notcher – AMT-40	40
Sow Hock Cutter – M-5	41

Bung

Bung Gun – B-GUN	41
Bung Plug with Rodder – B-PLUG	43

Dehiding

Air Dehider – TURBO-III	42
Dehider Blade	42
Sharpener and Conditioner – Quick-Set	42

Neck

Hog Head Dropper – HC-IV	43
Hog Neck Cleaner – RNC-I	44

Aitchbone

Hog Aitch Bone Cutter – M-6	44
-----------------------------	----

Breastbone

Hog Brisket Saw – EHB	45
Hog Brisket Saw – HKM-II	45
Hog Brisket Saw – AHB	46

Leaf Lard

Leaf Lard Puller – M-8	46
------------------------	----

Splitting

Hog Splitting Saw – BM-V-SD	47
Hog Splitting Saw – BM-V-SDB	47
Hog Splitting Saw – KM-160	48
Hog Splitting Saw – KM-210	48

Head Processing

Boar and Sow Head Table – Chisel & Jawbone – BST-I	58
Automatic Pork Head Table – Jawbone & Snout – JBT-I	59

Offal Processing

Tripe Washer and Refiner – TG-32, TG-48	54
Automatic Intestine Cutter – AIC-I	54
Pork Stomach Splitter – KSS-I	54
Automatic Intestine Splitter and Cleaner – AISC-I	54

PORK

Vacuum

Multiple Drop Vacuum System	54
Carcass Cleaning System – VAC-SAN	55

Breaking

Multi Purpose Bone Saw – 77	49
Primal Beef Breaking Saw – Super Speed	49
Pork Scribe Saw – SC-550	50
Breaking Saw, Rib Bone – SC-650	50
Breaking Saw, Rib Bone – HSC-650	51
Breaking Saw - Chine, Loins, Short Ribs – HSC-800	51
Electric Circular Breaking Saw – COLT	52
Electric Horizontal Breaking Saw – CHINE	52
Reciprocating Breaking Saw – ZIP SAW	53
Reciprocating Breaking Saw – K-9	53

SHEEP

Drive Ally

Electric Coaxer (Prodger) – KKAWE	74
-----------------------------------	----

Stunning

Electric Stunner (Constant Amperage) – KCS-1	72
Electric Stunner (Constant Voltage) – KEC-21	72
Electric Stunner (Constant Voltage) – KLC-1	73
Forks, Tongs, Head to Back	73

Oesophagus

Lamb K-Clip with Rodder – CLIP-L	69
----------------------------------	----

Horn and Hock

Sheep Horn Cutter – M-9	65
Hock Cutter – M-1	65

Neck

Neck Cutter – M-5	66
-------------------	----

Bung

Bung Plug with Rodder – B-PLUG	74
--------------------------------	----

Dehiding

Air Dehider – TURBO-III	68
Dehider Blade	68
Sharpener and Conditioner – Quick-Set	68

Breastbone

Sheep Brisket Saw – SBS-II	66
----------------------------	----

Breaking

Reciprocating Breaking Saw – ZIP SAW	67
Reciprocating Breaking Saw – K-9	67


Offal Processing

Tripe Washer and Refiner – TG-32, TG-48	71
---	----

Vacuum

Multiple Drop Vacuum System	69
Carcass Cleaning System – VAC-SAN	70

BEEF

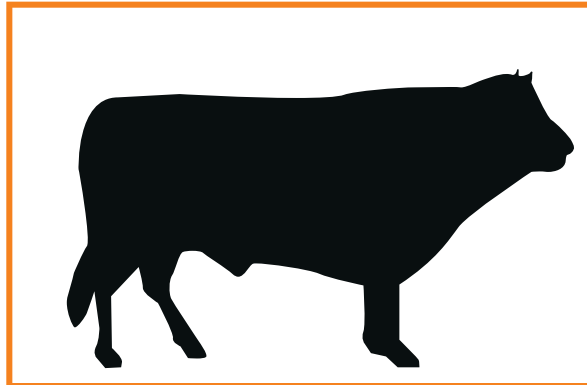

BEEF



Tel (956) 369-0129

Email: ventas@marekpartssupply.com

Web: marekpartssupply.com

BEEF





CLEANING

ARHC-I

PART NO. : 6220050

PNEUMATIC (AIR)

ROTO HIDE CLEANER

>> Features



- Light-weight air operated tool for cleaning of mudballs and dirt from the hide.
- Specially useful during winter months where dirt and mud freezes on hide.
- Reduces contamination on carcass during hide pulling process. Can be used with vacuum system to reduce and collect hair and dust.

Blade speed:
1950 RPM



Motor Power:
672 Watt (0.9 HP)
Air Consumption:
0.85 m3 / min (30 CFM)



3.6 kg (8 Lbs)



Air Pressure:
6.8 bar (100 psi)

BEEF



HORN SHEAR

HC-I

PART NO. : 6510100

CE Part No. :CE-6510100

HYDRAULIC

BEEF HORN SHEAR



- 3second cycle time to complete cut and re-open.
- 200 beef per hour.
- Dual control switch for operator safety.
- Heavy duty construction for continuous daily use.
- No electricity involved, air-over-oil pump system requires 90 psi (6 bar) air only.
- Ideal for use with over-the-head hide pulling operation or for on the rack.
- Easy to clean and sterilize, minimum maintenance required.
- Very efficient for normal run of cattle.

>>Power Unit

- HPP-I-A (Hydraulic Pump)
Hydraulic Pressure: 138 bar (2,000 psi)
Motor Horsepower: 7460 Watt (10 HP)
Oil Capacity: 15 Gallons
Flow: 7.5 GPM
- HP-I (Air-over-Oil)
Air Pressure Required: 6 bar (90 psi)
Air volume per stroke: 2.5 cu.ft.
Hydraulic Pressure: 172 bar (2,500 psi)



5" x 5"
127mm x 127 mm



Air Pressure:
6 bar (90 psi)



20.4 kg (45 Lbs)



Hydraulic Pressure:
138 bar (2000 psi)



HORN SHEAR

HC-II

PART NO. : 6520100
CE Part No. : CE-6520100



5" x 8"
127mm x 203 mm



Air Pressure:
6 bar (90 psi)



32 kg (70 Lbs)



Hydraulic Pressure:
138 bar (2000 psi)

HYDRAULIC BEEF HORN SHEAR

- 3second cycle time to complete cut and re-open.
- 200 beef per hour.
- Dual control switch for operator safety.
- Heavy duty construction for continuous daily use.
- Ideal for use with over-the-head hide pulling operation or for on the rack.
- Easy to clean and sterilize, minimum maintenance required.
- Very efficient for normal run of cattle and cow and bull operations.

>> Power Unit

- HPP-I-A (Hydraulic Pump)
Hydraulic Pressure: 138 bar (2,000 psi)
Motor Horsepower: 7460 Watt (10 HP)
Oil Capacity: 15 Gallons
Flow: 7.5 GPM
- HP-II (Air-over-Oil)
Air Pressure Required: 6 bar (90 psi)
Air volume per stroke: 3.72 cu.ft.
Hydraulic Pressure: 233 bar (3,385 psi)



HORN SHEAR

HCC-II

PART NO. : 6560000
CE Part No. : CE-6560000



5" x 7"
127mm x 178mm



Air Pressure:
6 bar (90 psi)



32 kg (70 Lbs)




Hydraulic Pressure:
138 bar (2000 psi)

HYDRAULIC BEEF HORN SHEAR

- Cup blade design.
- An efficient, powerfull dehorner capable of shearing of the toughest horns quickly with no nubbs left on the skull
- 3second cycle time to complete cut and re-open.
- 200 beef per hour.
- Dual control switch for operator safety
- Heavy duty construction for continuous daily use.
- Ideal for use with over-the-head hide pulling operation or for on the rack.
- Very efficient for normal run of cattle and cow and bull operations.

>>Power Unit

- HPP-I-A (Hydraulic Pump)
Hydraulic Pressure: 138 bar (2,000 psi)
Motor Horsepower: 7460 Watt (10 HP)
Oil Capacity: 15 Gallons
Flow: 7.5 GPM
- HP-II (Air-over-Oil)
Air Pressure Required: 6 bar (90 psi)
Air volume per stroke: 3.72 cu.ft.
Hydraulic Pressure: 233 bar (3,385 psi)



DEHORNER

A D

PART NO. : 6001800
 CE Part No. :CE-6001800



203 mm (8")



280 mm (11")



9 kg (20 Lbs)



Air Pressure:
6.8 bar (100 psi)



Blade speed:
1200 RPM


Motor Power:
1500 Watt (2.0 HP)

Air Consumption:
1.2 m³ / min (42 CFM)

PNEUMATIC (AIR) BEEF DEHORNER

>> Features

- Specially designed for low-medium production plants, with a hollow ground blade.
- The 11" diameter blade will cut through the older harder horns with ease and can be sterilized simply and quickly.
- The alligator jaws are self centering and the blade is visible at all times so that operator can enter precisely where he intends to.
- The saw blade is completely shrouded offering maximum safety to the operator.
- Compact design permits easy maneuverability and fast movement.
- Dual control switch for operator safety.



LEG, HORN

H C - 7

PART NO. : 6640000
 CE Part No. :CE-6640000



127 mm (5")



Air Pressure:
6 bar (90 psi)



24.5 kg (54 Lbs)



Hydraulic Pressure:
138 bar (2000 psi)

HYDRAULIC


HOCK AND HORN CUTTER

>> Features

- A powerful and fast scissor type horn and hock cutter for plants where the same tool can be used for both operations.
- Large 5 inch opening to cut all size legs with hide on or off and also large horns.
- Dual trigger for safety.
- Stainless steel construction.
- Easy to handle and maintain.

>> Power Unit

- HPP-I-A (Hydraulic Pump)
 Hydraulic Pressure: 138 bar (2,000 psi)
 Motor Horsepower: 7460 Watt (10 HP)
 Oil Capacity: 15 Gallons
 Flow: 7.5 GPM
- HP-II (Air-over-Oil)
 Air Pressure Required: 6 bar (90 psi)
 Air volume per stroke: 3.72 cu.ft.
 Hydraulic Pressure: 233 bar (3,385 psi)



HC-III

PART NO. : 6540100

CE Part No. : CE-6540100



127 mm (5")



Air Pressure:
6 bar (90 psi)



20 kg (44 Lbs)



Hydraulic Pressure:
138 bar (2000 psi)

HYDRAULIC

BEEF HOCK CUTTER


>> Features

- A powerful and fast scissor type hock cutter for high production plants.
- Large 5 inch opening to cut all size legs with hide on or off.
- Dual trigger for operators safety.
- Stainless steel construction.
- 1.5 second cycle time.
- Pneumatic control for trouble-free operation.
- Cutter can be hung vertically or horizontally for removal of both front and hind legs.

>> Power Unit

- HPP-I-A (Hydraulic Pump)
Hydraulic Pressure: 138 bar (2,000 psi)
Motor Horsepower: 7460 Watt (10 hp)
Oil Capacity: 15 Gallons
Flow: 7.5 GPM
- HP-I (Air-over-Oil)
Air Pressure Required: 6 bar (90 psi)
Air volume per stroke: 2.5 cu.ft.
Hydraulic Pressure: 172 bar (2,500 psi)

LEG



AL

PART NO. : 6002000



11 kg (25 Lbs)



127 mm (5")



255 mm (10")



Air Pressure:
6.8 bar (100 psi)



Motor Power:
1500 Watt (2.0 HP)
Air Consumption:
1.2 m³ / min (42 CFM)

Blade speed:
1200 RPM

PNEUMATIC (AIR)

BEEF LEG CUT-OFF SAW

>> Features

- Specially designed for low-medium production plants, with a hollow ground blade.
- The 10" diameter blade will cut through the older harder bones with ease and can be sterilized simply and quickly.
- The alligator jaws are self centering and the blade is visible at all times so that operator can enter precisely where he intends to.
- The saw blade is completely shrouded offering maximum safety to the operator.
- Compact design permits easy maneuverability and fast movement.
- Dual control switch for operator safety.

LEG



LEG

AHC-I

PART NO. : 6230000

CE Part No. :CE-6230000



90 mm (3.5")



Air Pressure:
6.8 bar (100 psi)



20 kg (44 Lbs)

PNEUMATIC (AIR)

AIR HOCK CUTTER

>> Features

- Simple design and easy to handle cutter for cutting beef and hog legs at the joint.
- Dual triggers and anti-tie-down for operator safety.
- Built with non-corrosive materials for cleanliness.



HEAD, NECK

M-5

PART NO. : 6606000

CE Part No. :CE-6606000



100 mm (3.9")



Air Pressure:
6 bar (90 psi)



8.6 kg (19 Lbs)



Hydraulic Pressure:
100 bar (1500 psi)

HYDRAULIC

LEG CUTTER

>> Features

- Powerful, fast and efficient hydraulic cutter with 3.9 inch (100 mm) blade opening for sheep neck cutting, for beef, and for pork hock cutting operations.
- A high-production tool that is compact and easy to maneuver for operator comfort.
- Constructed from stainless steel and non-corrosive materials for ease of cleaning and sanitation.

>> Power Unit

- HPP-III-A (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 2240 Watt (3 HP)
Oil Capacity: 15 Gallons
Flow: 3.0 GPM
- B-2 (Air-over-Oil)
Air Pressure Required: 6-7 bar (100 psi)
Oil Volume - output: 4.5 cu.in.
Hyd. Press. - output: 103 bar (1,500 psi)

BEEF



DEHIDING

TURBO-III

PNEUMATIC (AIR) AIR DEHIDER

PART NO. : 6303000 (4 bar (60 psi) option)

PART NO. : 6303100 (6 bar (90 psi) option)



>> Turbo-III



110 mm
(4.33") 100
mm (3.94")



1.24 kg (2 Lb 12 oz.s)



Air Pressure:
4 bar (60 psi)
6 bar (90 psi)



Blade speed:
6,000 - 8,500 rpm

- Removes perfect hides faster with increased efficiency.
- Reduce vibration and weight for improved performance.
- Low maintenance cost, easy to keep clean and maintain.
- Blades are available in:
4.33" (110mm)
3.94" (100mm)
3.54" (90mm)
- Model A : operates with 90 PSI (6 bars) pressure
- Model B : operates with 60 PSI (4 bars) pressure



TOOL

QUICK-SET

ELECTRIC DEHIDER BLADE SHARPENER AND CONDITIONER

PART NO. : 6310000




21 kg (46 Lbs)
Dimensions:
255 mm wide x 355 mm long x 255 mm high
(10" wide x 14" long x 10" high)



115 V / 230 V, 50/60 HZ
SINGLE PHASE MOTORS

>> Features

- Recondition dehider blades to like new condition, simple to set up and use. Index system positions each tooth for quick sharpening with cbn coated grinding wheel.
- Machine will sharpen 1.33" (110mm), 3.98" (100mm), and 3.54" (90mm) blades.



BREASTBONE

500E

PART NO. : 1050000
 CE Part No. :CE-1050000



Blade length;
 305 mm (12")



37 kg (82 Lbs)




746 Watt (1.0 HP)
 42 V - 550 V, 50/60 HZ
 3 PHASE MOTORS

ELECTRIC BEEF BRISKET SAW

>> Features

- Compact and easy to maneuver beef brisket saw.
- One H.P. electric motor for medium size plants.
- Built-in lubrication system for years of trouble-free operation.

BEEF



BREASTBONE

EBB-II

PART NO. : 1080000
 CE Part No. :CE-1080000



Blade length;
 305 mm (12")



40 kg (87 Lbs)



1500 Watt (2.0 HP)
 42 V - 550 V, 50/60 HZ
 3 PHASE MOTORS

ELECTRIC BEEF BRISKET SAW

>> Features

- Heavy duty, high-production beef brisket saw with 2 H.P. totally sealed motor.
- Dual trigger for operator safety, built-in counterbalance system for reduced vibration and noise.
- Meets national and international requirements for sanitation and safety.



BREASTBONE

ABB-II

PART NO. : 6330000

CE Part No. :CE-6330000



Blade length;
305 mm (12")



Motor Power:
1500 Watt (2.0 HP)
Air Consumption:
1.2 m³ / min (42 CFM)



19.5 kg (43 Lbs)




Air Pressure;
6.8 bar (100 psi)

PNEUMATIC (AIR) BEEF BRISKET SAW

>> Features

- High speed, heavy-duty and light-weight machine for fast and efficient splitting of beef briskets.
- Dual trigger for operator safety, built-in counterbalance system for reduced vibration and noise.
- Easy to handle and maneuver for operator comfort.
- Meets national and international requirements for sanitation and safety.



BREASTBONE

HBB-II

PART NO. : 6551000

CE Part No. :CE-6551000



Blade length;
305 mm
(12")



Hydraulic Motor Power:
3000 Watt (4.0 HP)



18 kg (40 Lbs)



Hydraulic Pressure;
138 bar (2000 psi)
Air Pressure (Triggers);
6.0 bar (90 psi)

Blade speed:
2200 RPM

HYDRAULIC BEEF BRISKET SAW

>> Features

- High speed, heavy duty and easy to maneuver beef brisket saw for fast and efficient splitting of beef briskets.
- Dual trigger for operator safety, built-in counterbalance system for reduced vibration and noise.
- Machine requires hydraulic pump, no electricity at the machine for safety.
- Meets national and international requirements for sanitation and safety.

>> Power Unit

- HPP-II-E (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 3730 Watt (5 HP)
Oil Capacity: 15 Gallons
Flow: 4.0 GPM



BREASTBONE

153

PART NO. : 1530000

ELECTRIC

BEEF BRISKET SAW

>> Features



- Most powerful, high production beef brisket saw available with cleaver-action cutting motion.
- 2H.P. totally sealed electric motor.
- Built-in sterilization system.
- Heavy-duty construction.
- Easy to handle and maintain.
- U.S.D.A. Approved.



Blade length;
305 mm (12")



56 kg (124 Lbs)



1500 Watt (2.0 HP)
42 V - 550 V, 50/60 HZ
3 PHASE MOTORS

BEEF



SPLITTING

75

PART NO. : 1070000

CE Part No. : CE-1070000

ELECTRIC

BEEF SPLITTING SAW

>> Features



- Aversatile, economical and powerful saw designed for small slaughtering and locker plants.
- Can split all size beef and pigs quickly and efficiently.
- 2H.P. Sealed electric motor.



Blade length;
623 mm (24.5")


Cutting Distance (Guide opening):
406 mm (16")



62 kg (136 Lbs)



1500 Watt (2.0 HP)
42 V - 550 V, 50/60 HZ
3 PHASE MOTORS



SPLITTING

151

PART NO. : 1500000



Blade length;
826 mm (32.5")

Cutting Distance (Guide opening):
635 mm (25")



63 kg (138 Lbs)




1500 Watt (2.0 HP)
42 V - 550 V, 50/60 HZ
3 PHASE MOTORS

ELECTRIC

BEEF SPLITTING SAW

>> Features

- 2H.P. Totally sealed electric motor.
- Can split up to 65 cattle per hour.
- Heavy-duty construction.
- Easy to maintain and clean.



SPLITTING

203

PART NO. : 1200000



Blade length;
826 mm (32.5")

Cutting Distance (Guide opening):
660 mm (26")



91 kg (200 Lbs)



2240 Watt (3.0 HP)
42 V - 550 V, 50/60 HZ
3 PHASE MOTORS

ELECTRIC

BEEF SPLITTING SAW

>> Features

- Heavy-duty beef splitting saw with cleaver-action cutting system for fast, accurate, and clean cuts at the rate of 200 beef per hour.
- Machine incorporates 3 horsepower high torque totally sealed electric motor high overload capacity to cut the hardest bones.
- One shot lubrication system for long trouble-free operation.



BM - V - SB

PART NO. : 1708050 (ELECTRIC TRIGGERS)

PART NO. : 1708250 (AIR TRIGGERS)

CE Part No. : CE-1708050



Blade length;
3327 mm (131")

Cutting Distance (Guide opening):
533 mm (21")



93 kg (203 Lbs)



2240 Watt (3 HP) / 3730 Watt (5 HP)
42 V - 550 V, 50/60 HZ
3 PHASE MOTORS

ELECTRIC BULL SPLITTING SAW

- High-speed, powerful and fast splitting saw designed to split up to 120 beef per hour.
- High torque 3 H.P. (5 H.P. Optional) motor enables the saw to cut through bulls and hard bone cows with ease.
- Meets national and international requirements for sanitation and safety.
- Saw incorporates built-in hot water sterilization system for hygienic and sanitary operation.
- Excellent blade life of up to 750 carcass per blade.

>> Options

- Air switches
- Anti-Tie-Down

DIAMETER FRONT WHEEL: 305 mm (12")
DIAMETER REAR WHEEL: 381 mm (15")
BLADE TO BEAM: 330 mm (13")



BM - V - S

PART NO. : 1708000 (ELECTRIC TRIGGERS)

PART NO. : 1708200 (AIR TRIGGERS)

CE Part No. : CE-1708000



Blade length;
3100 mm (122")

Cutting Distance (Guide opening):
483 mm (19")



89 kg (197 Lbs)



2240 Watt (3.0 HP)
42 V - 550 V, 50/60 HZ
3 PHASE MOTORS

ELECTRIC BEEF SPLITTING SAW

- High-speed, powerful and fast splitting saw designed for use in high production beef plants.
- High torque 3 H.P. (5 H.P. Optional) electric motor, heavy-duty construction, ease of maintenance, and operator comfort makes this model a first choice.
- Meets national and international requirements for sanitation and safety.
- Saw incorporates built-in hot water sterilization system for hygienic and sanitary operation.
- Excellent blade life of up to 750 carcass per blade.

>> Options

- Air switches
- Anti-Tie-Down

DIAMETER FRONT WHEEL: 305 mm (12")
DIAMETER REAR WHEEL: 305 mm (12")
BLADE TO BEAM: 305 mm (12")



SPLITTING

BM-V-SD

ELECTRIC HOG AND BEEF SPLITTING SAW

PART NO. : 1708100 (ELECTRIC TRIGGERS)

PART NO. : 1708300 (AIR TRIGGERS)

CE Part No. : CE-1708100



Blade length;
2972 mm (117")

Cutting Distance (Guide opening):
483 mm (19")



79 kg (173 Lbs)



1500 Watt (2 HP) / 2240 Watt (3 HP)
42 V - 550 V, 50/60 HZ
1 PHASE / 3 PHASE MOTORS

- A high speed, powerful, and versatile beef and hog splitting saw especially designed for use by plants where both species are split.
- High torque 2 H.P. (3 H.P. Optional) electric motor and heavy-duty construction for trouble-free operation.
- Meets national and international requirements for sanitation and safety.
- Saw incorporates built-in hot water sterilization system for hygienic and sanitary operation.

>> Options

- Air switches
- Anti-Tie-Down

DIAMETER FRONT WHEEL: 216 mm (8.5")
DIAMETER REAR WHEEL: 305 mm (12")
BLADE TO BEAM: 255 mm (10")



SPLITTING

BM-V-SDB

ELECTRIC HOG AND BEEF SPLITTING SAW

PART NO. : 1730000 (ELECTRIC TRIGGERS)

PART NO. : 1731000 (AIR TRIGGERS)

CE Part No. : CE-1730000



Blade length;
2896 mm (114")

Cutting Distance (Guide opening):
483 mm (19")



76 kg (167 Lbs)



1150 Watt (2.0 HP)
42 V - 550 V, 50/60 HZ
1 PHASE / 3 PHASE MOTORS

- A hog splitting saw capable of splitting up to 600 hogs and sows per hour.
- High torque 2 H.P. (3 H.P. Optional) electric motor and heavy-duty construction for trouble-free operation.
- Meets national and international requirements for sanitation and safety.
- Saw incorporates built-in hot water sterilization system for hygienic and sanitary operation.

>> Options

- Air switches
- Anti-Tie-Down

DIAMETER FRONT WHEEL: 178 mm (7")
DIAMETER REAR WHEEL: 305 mm (12")
BLADE TO BEAM: 229 mm (9")




QUARTERING

BM - V - LB

PART NO. : 1740000

CE Part No. : CE-1740000

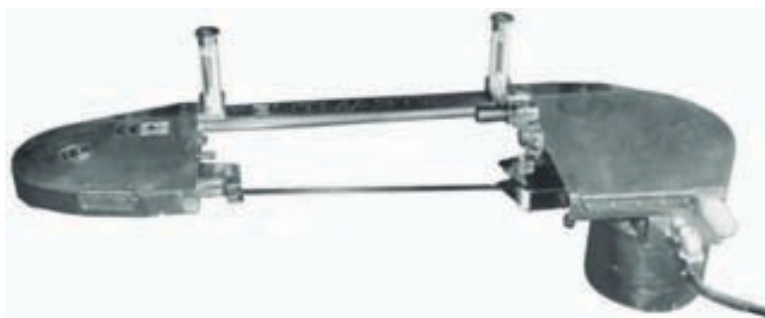

Blade length;
3327 mm (131")

Cutting Distance (Guide opening):
533 mm (21")



95 kg (210 Lbs)



2240 Watt (3 HP) / 3730 Watt (5 HP)
42 V - 550 V, 50/60 HZ
3 PHASE MOTORS

LOIN DROPPER - ELECTRIC HORIZONTAL BAND SAW

>> Features

- Apowerful high speed bandsaw designed for beef loin dropping operations.
- Built in water spray system for sanitation by reducing the accumulation of meat and bone particles within the saw frame.
- Dual handles and triggers for operator safety.
- Adjustable suspension hanger for ease of handling and accurate cutting.



QUARTERING

HC - VI

PART NO. : 6540400 (HC-VI-LEFT)

PART NO. : 6540500 (HC-VI-RIGHT)

CE Part No. : CE-6540400



35 kg (76 Lbs)



330 mm (13")



Cut Depth:
530 mm (21")



Air Pressure:
6 bar (90 psi)



Hydraulic Pressure:
138 bar (2000 psi)



HYDRAULIC LOIN DROPPER


>> Features

- Apowerful, fast hydraulic tool capable of handling up to 500 loins per hour with no bone dust.
- Two trigger and anti-tie-down controls for operator safety.
- Heavy-duty construction for long trouble free operation.
- Stainless steel construction for ease of cleaning and hygiene.

>> Power Unit

- HPP-I-B (Hydraulic Pump)
Hydraulic Pressure: 138 bar (2,000 psi)
Motor Horsepower: 7460 Watt (10 HP)
Oil Capacity: 15 Gallons
Flow: 7.8 GPM

BEEF



HEAD, NECK

HC - V

PART NO. : 6540200
CE Part No. : CE-6540200



280 mm (11")



Air Pressure:
6 bar (90 psi)



23 kg (51 Lbs)



Hydraulic Pressure:
138 bar (2000 psi)

HYDRAULIC

BEEF HEAD DROPPER

>> Features

- Robust, heavy-duty, fast and efficient beef head dropper. 1.5 second cycle time to keep pace with the fast high production plants.
- Dual trigger and anti-tie-down system for operator safety.
- Pneumatic control triggers for trouble free operation.
- Stainless steel and non corrosive materials for ease of cleaning and sanitation.

>> Power Unit

HPP-I-A (Hydraulic Pump)

Hydraulic Pressure: 138 bar (2,000 psi)
Motor Horsepower: 7460 Watt (10 HP)
Oil Capacity: 15 Gallons
Flow: 7.5 GPM

HP-II (Air-over-Oil)

Air Pressure Required: 6 bar (90 psi)
Air volume per stroke: 3.72 cu.ft.
Hydraulic Pressure: 233 bar (3,385 psi)


BEEF



HEAD

M - 2

PART NO. : 6602000
CE Part No. : CE-6602000

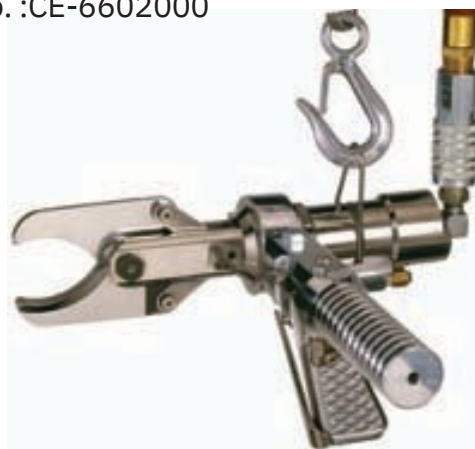

38 mm (1.5")



Air Pressure:
6 bar (90 psi)



3.6 kg (8 Lbs)



Hydraulic Pressure:
100 bar (1500 psi)

HYDRAULIC

BEEF TONGUE BONE CUTTER

>> Features

- Heavy-duty, robust, and fast beef tongue bone cutter.
- Compact and easy to maneuver for ease of operation.
- Cuts tongue bone accurately with no bone chips.
- Stainless steel and non-corrosion materials for ease of cleaning and sanitation.


>> Power Unit

HPP-III-A (Hydraulic Pump)

Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 2240 Watt (3 HP)
Oil Capacity: 15 Gallons
Flow: 3.0 GPM

B-1 (Air-over-Oil)

Air Pressure Required: 6-7 bar (100 psi)
Oil Volume - output: 2.7 cu.in.
Hyd. Press. - output: 103 bar (1,500 psi)



HEAD PROCESSING

BHT-I

PART NO. : 1151000



Pump Capacity:
20 Gal / min - Single Table
29 Gal / min - Double Table



193 kg (425 Lbs)



Air Pressure:
6 bar (90 psi)



Hydraulic Pressure:
70 bar (1000 psi)

BEEF HEAD TABLE CHISEL AND JAWBONE PULLER

>> Features

- Reduces Operator Stress and Injury.
- Increase Yield Due To Reduced operator Fatigue.
- Hydraulically Powered With Air Control.
- All Stainless Steel Construction.
- USDA Approved.
- Used by Major Packers in USA.
- Complete System Designed to Meet Your Needs.
- Rated to 250 Head per Hour.
- Adjustable Operator Stand.
- Consistent Product Quality.
- Can be used to only pull jawbones.
- Cheekmeat Puller option available.

BEEF



OFFAL PROCESSING

AIC-I

PART NO. : 1160000



Approx wt 50 lbs.

>> Power Unit

- HPP-II-C (Hydraulic Pump)
Hydraulic Pressure: 138 bar (2,000 psi)
Motor Horsepower: 3730 Watt (5 HP)
Oil Capacity: 15 Gallons
Flow: 7.5 GPM

HYDRAULIC AUTOMATIC INTESTINE CUTTER

>> Features

- All Stainless Steel Construction.
- USDA approved.
- Built in control allows adjustment in product length.
- Innovative Quick-change blade design.
- Reduces labor.
- Hydraulic driven with air safety control.
- Utilizing your employees in the most efficient manner possible and having up to three employees cutting intestines to length is not the best use of their time. Kentmaster Mfg. introduces the solution to that problem with the model AIC-1 automatic intestine cutter. This compact unit takes the place of the personnel at the discharge end of your intestine splitting machine, allowing you to utilize them in a more efficient and profitable way.
- Handles approximately 500 head per hour.
- Can be attached to Automatic Intestine Splitter and Flusher or ran separately.
- Dim: 12" wide x 20" long x 24" high.



TG - 32

TG - 48

OFFAL PROCESSOR TRIPE WASHER AND REFINER

PART NO. : 1130000 (TG-32)

PART NO. : 1140000 (TG-48)



>> Features

- Pivoting dome opens automatically.
- All stainless steel construction.
- reduced clean-up time.
- Easy to inspect.
- Reduced maintenance cost.
- Reduced water usage.
- USDA approved.

>> Capacity:

TG-32 Washer and Refiner

- The TG-32 handles approximately 150 lbs of any product.
- Beef:
Tongues, tails, cheekmeat, tendons, feet, tripe, honeycomb and ommassum.
- Pork:
Hearts, bungs, ears, snouts, feet, stomachs, tongues and intestines.
- Lamb:
Stomachs, feet and heads.

TG-48 Washer and Refiner

- Beef:
250-275 paunches per hour.
300 ommassum per hour.
150 - 160 head per hour both products.

>> TG-32 Specification

- Water Inlet: 1" requires minimum 16GPM @60 psi
- Drain outlet 4" NPT



Dim: 30" wide x 63" long x 51" high.
Approx wt 1300 lbs.



5600 Watt (7.5 HP)
230/460 V, 50/60 HZ
3 PHASE MOTORS

>> TG-48 Specification

- Water Inlet: 1" requires minimum 24GPM @60 psi
- Drain outlet 4" NPT



Dim: 63" wide x 96" long x 96" high.
Approx wt. 1700 lbs.



18650 Watt (25 HP)
230/460 V, 50/60 HZ
3 PHASE MOTORS



AISC-I

PART NO. : 1180000

AUTOMATIC INTESTINE SPLITTER AND CLEANER



>> Features

- All Stainless Steel Construction.
- Safety E-stop controls with top cover engaged safety switches.
- Specially designed spray system and baffles reduces product damage.
- Ergonomically designed to relief operator fatigue.
- Produces cleaner product with higher yields.
- Reduces Re-work.
- Separate Hydraulic Power Units.
- Complete Systems Available Including Auto-Intestine Cutter and TG-32 Offal Washer.
- Hydraulic Power Unit HPP-IV-A, 10 HP.

>> Automatic Intestine Splitter and Cleaner

The Kentmaster Automatic Intestine Cleaning Machine is designed to split and clean the intestines without damage to the product. The product is fed onto feed rods and then conveyed through a cabinet. A series of specially designed sprayers and baffles gently flush and clean the product. This reduces product damage and increases yields. The machine has two separate hydraulic powered conveyors and cutter blades. The machine has built-in safety controls. The machine is easy to clean and maintain.



159 kg (350 Lbs)

>> Power Unit

- HPP-IV-A (Hydraulic Pump)
 - Hydraulic Pressure: 138 bar (2,000 psi)
 - Motor Horsepower: 7460 Watt (10 HP)
 - Oil Capacity: 15 Gallons
 - Flow: 8.0 GPM



VAC-SAN

CARCASS CLEANING SYSTEM STEAM-HOT WATER-VACUUM

PART NO. : 6005000 (WATER AND STEAM)

PART NO. : 6005100 (STEAM ONLY)




>> Carcass Cleaning System

The Kentmaster Vac-San I for carcass cleaning was one of the most revolutionary breakthroughs in the meat industry. This system was designed to remove visible contamination without trimming thus reducing product damage and increasing yields. This USDA approved and patented process is used in meat plants throughout the world to produce a cleaner and more wholesome product. Units are available with steam/hot water, steam only and water only.

>> Features

- Removes contamination without trimming.
- Increase yields.
- USDA tested and approved.
- Variety of wands available to choose from.
- Can be used with chemical.





VACUUM

KVS - I

PART NO. : 6006000



Blade speed:
2200 RPM



Motor Power:
2984 Watt (4.0 HP)



5.5 kg (12 Lbs)



203 mm (8")



Hydraulic Pressure:
100 bar (1500 psi)

HYDRAULIC

SPINAL CORD REMOVER


>> Features

- Removes cord sheath and attached ganglia.
- Saw Bone Channel Clean.
- Product contained in cyclone for disposal.

>> Power Unit

- HPP-II-B (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 3730 Watt (5 HP)
Oil Capacity: 15 Gallons
Flow: 4.0 GPM

BEEF



VACUUM

BRAIN - V

BRAIN/SPINAL CORD VACUUM

Brain Vacuum



Multiple Drop Vacuum System

>> Multiple Drop Vacuum System

Multiple Drop Vacuum Systems from Kentmaster are custom designed to meet your specific needs. We have many systems for carcass vacuums, spinal cord removal, brain removal and many other applications. We have many systems in operation for over 10 years. We look forward to designing a system to meet your needs. Kentmaster was the industry leader in developing and providing this technology to the meat industry.

>> Multiple Drop Vacuum System Features

- Custom designed systems to meet your needs and carcass vacuums.
- Double Dump Valve available.
- Great flexibility for layout installation.
- Easier to maintain and monitor.

>> Brain Vacuum Features

- Removes Spinal Cord and Sheath from Backbone.
- Removes Brain from Head.
- Product is contained for disposal.
- Uses separate vacuum or central system.



BEEF BREAKING

77

PART NO. : 6001600



10 kg (23 Lbs)



203 mm (8") thru
305 mm (12")



Air Pressure:
6.8 bar (100 psi)



Motor Power:

1500 Watt (2.0 HP)

Air Consumption:

1.2 m³ / min (42 CFM)

Blade speed:

1200 RPM

PNEUMATIC (AIR)

MULTI PURPOSE BONE SAW



>> Features

- A powerful, light weight machine that is easy to maneuver for pork and beef breaking operations.
- 2 horse power motor and 110 mm (4.5") dept of cut for primal cutting of forequarters, hindquarters, chucks, shoulders, briskets, and pork ham marking and breaking.



BEEF BREAKING

SUPER SPEED

PART NO. : 1000200



203 mm (8") thru
305 mm (12")

Blade speed:
1400 RPM



21 kg (46 Lbs)



1120 Watt (1.5 HP) High Speed
42 V - 550 V, 50/60 HZ
3 PHASE MOTORS


ELECTRIC

PRIMAL BEEF BREAKING SAW



>> Features

- Heavy-Duty 2 H.P. breaking saw, ideal for cutting forequarter, hindquarter and other cuts of beef and pork.
- Saw rotates within the suspension hanger to any desired angle with ease.
- Waterproof dual controls for operator safety.



BREAKING

SC-400

PART NO. : 6200000



2 kg (4.5 Lbs)



102 mm (4")



Air Pressure:
6 bar (90 psi)



Motor Power:

672 Watt (0.9 HP)

Air Consumption:

0.85 m³ / min (30 CFM)

Blade speed:

5000 RPM

PNEUMATIC (AIR)

BEEF SCRIBE SAW



>> Features

- Features include increased production and accurate scribing of beef carcass without bone splinters and miscuts.
- Alight weight, heavy duty, pneumatic tool designed for todays high productions plants.
- Can be used on-the-rail or table operations, can cut up to 320 beef per hour to any depth up to ¾ inch (19mm) with depth gauge.
- Instant stop blade for safety, constructed from high quality materials, stainless steel & heat treated aluminum for durability, sanitary operation and reduced maintenance cost.

BEEF



BREAKING

SC-550

PART NO. : 6210000



2.7 kg (6 Lbs)



140 mm (5.5")



Air Pressure:
6 bar (90 psi)



Motor Power:

672 Watt (0.9 HP)

Air Consumption:

0.85 m³ / min (30 CFM)

Blade speed:

1950 RPM

PNEUMATIC (AIR)

PORK AND BEEF SCRIBE SAW



>> Features

- Alightweight, heavy duty tool for accurate scribing of pork without bone splinters and miscuts.
- Designed for on-the-rail or table operations.
- For up to 1,500 pork sides per hour.
- Can cut though tough bone quickly for greater productivity with ease.
- Machine incorporates an adjustable stainless steel depth gauge for accurate control of depth of cut.
- Constructed from high quality materials, stainless steel and heat treated aluminum for durability, ease of cleaning, sanitary operation and reduced maintenance cost.



BEEF
BREAKING

SC-650

PART NO. : 6220000

PNEUMATIC (AIR)

BREAKING SAW, RIB-BONE



>> Features

- Afast, versatile multi-purpose saw designed for a variety of beef and pork operations.
- Saw is light weight and fast with high torque.
- Stops instantly when trigger is released.
- Incorporates adjustable stainless steel depth gauge for accurate control of depth of cut to 2 inches (51mm).



3 kg (6.6 Lbs)



165 mm (6.5")



Air Pressure:
6 bar (90 psi)



Motor Power:

672 Watt (0.9 HP)

Blade speed:

Air Consumption:

1950 RPM

0.85 m³ / min (30 CFM)



BEEF
BREAKING

HSC-650

PART NO. : 6220100

HYDRAULIC

BREAKING SAW, RIB -BONE



>> Features

- Apowerfull, fast multi-purpose saw designed for a variety of beef and pork operations.
- Hydraulic system allows high speed and high torque combined with a light weight and easy to handle saw to cut through tough bones.
- Easy to clean and maintain, machine incorporates adjustable stainless steel depth gauge for accurate control of depth of cut.



3.2 kg (7 Lbs)



165 mm (6.5")



Blade speed:
2200 RPM

Motor Power:

2984 Watt (4.0 HP)

Hydraulic Pressure:
100 bar (1500 psi)

>> Power Unit

- HPP-II-B (Hydraulic Pump)

Hydraulic Pressure: 103 bar (1,500 psi)

Motor Horsepower: 3730 Watt (5 HP)

Oil Capacity: 15 Gallons

Flow: 4.0 GPM



HSC-800

PART NO. : 6222000

HYDRAULIC BREAKING SAW CHINE, LOINS, SHORT RIBS



>> Features

- A powerfull, fast multi-purpose saw designed for a variety of beef and pork operations.
- Hydraulic system allows high speed and high torque combined with a light weight and easy to handle saw to cut through tough bones.
- Machine incorporates an 8 inch diameter saw blade with adjustable stainless steel depth gauge for accurate control of depth of cut.



Blade speed:
2200 RPM



Motor Power:
2984 Watt (4.0 HP)



3.6 kg (8 Lbs)




203 mm (8")



Hydraulic Pressure:
100 bar (1500 psi)

>> Power Unit

- HPP-II-B (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 3730 Watt (5 HP)
Oil Capacity: 15 Gallons
Flow: 4.0 GPM



SL-1100

PART NO. : 6320000

PNEUMATIC (AIR)

CIRCULAR BREAKING SAW



>> Features

- Alight weight, easy to handle saw with flexibility of blades from 8 inch to 12-inch diameter.
- Saw can be used in any angle with circular hanger.
- Ideal for a variety of beef and pork cutting operations including beef chucks, forequarters, ribs, and briskets.
- Instant stop saw blade. constructed from corrosion resistance material for ease of cleaning and sanitation.



7.7 kg (17 Lbs)



203 mm (8") thru
305 mm (12")



Air Pressure:
6 bar (90 psi)



Motor Power:


1500 Watt (2.0 HP)

Air Consumption:

1.2 m3 / min (42 CFM)

Blade speed:

1100 RPM



BEEF BREAKING

SL-1100-C

PART NO. : 6321000

PNEUMATIC (AIR)

HORIZONTAL BREAKING SAW



>> Features



- Afast, compact, and powerful saw specially designed for production line cutting of beef forequarters and cutting between the 5th & 6th rib in high production plants.
- Blade stops instantly when trigger is released.
- Constructed from corrosion resistant materials for ease of cleaning and sanitation.



7.7 kg (17 Lbs)



203 mm (8") thru
305 mm (12")



Air Pressure:
6 bar (90 psi)



Motor Power:

1500 Watt (2.0 HP)

Air Consumption:

1.2 m3 / min (42 CFM)

Blade speed:

1100 RPM



BEEF BREAKING

COLT

PART NO. : 1001600

CE Part No. :CE-1001600

ELECTRIC

CIRCULAR BREAKING SAW

>> Features



- Alight weight saw that can be used without a balancer, for a variety of operations.
- Combination of high speed and high power for cutting tough, hard bones with ease.
- Heavy duty single phase motor combined with precision worm gear for durability and ease of maintenance.
- Avaliable with depth gauge for control of depth of cut.



203 mm (8") thru
255 mm (10")

Blade speed:
4500 RPM



7.7 kg (17 Lbs)



2090 Watt (2.8 HP)
115/230 V, 50/60 HZ
1 PHASE MOTORS



BREAKING

CHINE

ELECTRIC CHINE SAW - COLT HORIZONTAL BREAKING SAW

PART NO. : 1002200
CE Part No. :CE-1002200



203 mm (8") and
229 mm (9")

Blade speed:
4500 RPM



7.7 kg (17 Lbs)



2090 Watt (2.8 HP)
115/230 V, 50/60 HZ
1 PHASE MOTORS

>> Features

- Lightweight, single phase electric saw that is extremely fast and powerful for pork chinning operation.
- Easy to handle and compact for operator comfort.



BREAKING

HKM - I

HYDRAULIC

PART NO. : 6622000

CIRCULAR BREAKING SAW



>> Features



203 mm (8") thru
305 mm (12")



Motor Power:
3730 Watt (5.0 HP)

Blade speed:
1200 RPM



9 kg (20 Lbs)




Hydraulic Pressure;
138 bar (2000 psi)
Air Pressure (Triggers);
6.0 bar (90 psi)

- Swivel hanger for easy movement to any angle.
- Dual trigger for operator safety.
- Easy to clean and maintain.
- Constructed from corrosion resistance materials for sanitation.
- A powerfull, fast and versatile saw that will not slow down even in hard bones.
- Ideal for cutting forequarters, beef chucks, brisket and other beef and pork cuts.

>> Power Unit

- HPP-II-C (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 3730 Watt (5 HP)
Oil Capacity: 15 Gallons
Flow: 7.5 GPM

BEEF



BEEF
BREAKING

H K M - I I I

PART NO. : 6623000



Hydraulic Pressure;
103 bar (1500 psi)
Air Pressure (Triggers);
6.0 bar (90 psi)

Blade speed:
1300 RPM



6 kg (13 Lbs)



Motor Power:
1500 Watt (2.0 HP)



203 mm (8") thru
305 mm (12")

HYDRAULIC

CIRCULAR BREAKING SAW




>> Features

- Aversatile, easy to handle and powerful saw capable of cutting forequarters, ribs, briskets, chuck and shoulder and other beef and pork cuts.
- Instant stop blade.
- Constructed from corrosion resistance materials for ease of cleaning and sanitation.

>> Power Unit

- HPP-II-D (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 3730 Watt (5 HP)
Oil Capacity: 15 Gallons
Flow: 4.0 GPM



BEEF
BREAKING

H K M - I V

PART NO. : 6624000



Hydraulic Pressure;
103 bar (1500 psi)
Air Pressure (Triggers);
6.0 bar (90 psi)



Motor Power:
1500 Watt (2.0 HP)



6 kg (13 Lbs)



Blade speed:
1300 RPM

203 mm (8") thru
305 mm (12")

HYDRAULIC

HORIZONTAL BREAKING SAW



>> Features

- Afast, compact and powerful hydraulic saw specially designed for use in horizontal position for high production cutting of forequarters and cutting between the 5 th & 6th rib of beef.
- Blade stops instantly when trigger is released.
- Constructed from corrosion resistant materials for ease of cleaning and sanitation.

>> Power Unit

- HPP-II-D (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 3730 Watt (5 HP)
Oil Capacity: 15 Gallons
Flow: 4.0 GPM



ZIP SAW

PART NO. : 1900000



Blade length;
203 mm (8")
406 mm (16")



8.2 kg (18 Lbs)



1000 Watt (1.3 HP)
115/230 V, 50/60 HZ
1 PHASE MOTORS

ELECTRIC

RECIPROCATING BREAKING SAW



>> Features

- Electric powered reciprocating saw for breaking operations for beef and pork. Counter balanced drive system for reduced noise and vibration.
- Lightweight combined with high speed makes an ideal machine for cutting of forequarters, brisket opening, primal cuts and general purpose applications.
- Counter balanced drive system for reduced noise and vibration.



K - 9

PART NO. : 1910000



Blade length;
203 mm (8")
406 mm (16")



9.7 kg (21.5 Lbs)



1500 Watt (2 HP)
115/230 V, 50/60 HZ
1 PHASE MOTORS

ELECTRIC

RECIPROCATING BREAKING SAW



>> Features

- A heavy-duty, light weight reciprocating saw for use on production breaking lines and general all around cutting.
- 2H.P. motor enables saw to cut through hard bones with ease. Maneuverable for cutting in any angle and ideal for cutting forequarters, primal cuts, chucks, shoulder and other beef and pork cutting operations. Double insulated motor for operator safety.



KK AWE

PART NO. : 2021100



Caoxer with extension pole


ELECTRIC CAOXR (PRODDER)



>> Features

- Robust design.
- Steam jet proof.
- Electronic control, no mechanical attrition.
- Type KKAWE 21 according to the new national and European regulations concerning animal protection during stunning procedure and transport.
- Suited for accumulator.
- Optical indicator.
- Electronic maintenance free.
- Higher capacity.

DRIVE ALLY



ST - GUN

BOLT STUNNER With Cartridges (power loads)



KC



KS



KR



KL




>> TYPES OF BOLT STUNNERS

- PART NO. : 2021140 - Type KS: Automatic bolt-retraction system
- PART NO. : 2021150 - Type KR: Bolt damping by means of rubber buffers
- PART NO. : 2021160 - Type KL: Construction as type KR with elongated bolt
- PART NO. : 2021170 - Type KC: Concussion stunning

- Most powerful penetration power and high slaughter capacity.
- Reduces kicking movements of the animal after stunning significantly - easier shackling.
- Effective security system for trigger
- Self-acting cartridge ejector.
- Quick locking bayonet breech.
- Robust design for rough working conditions.
- Automatic bolt-retraction system (types KS, KC) - no sticking of bolt in the animal's head after stunning.
- Easy handling.
- Low costs for cleaning and maintenance.
- Low cost, high power cartridges (cal. 6.8/15).
- Effective stunning by means of type KL even for heaviest bulls or water buffaloes.

STUNNING



PBS - 1

PART NO. : 6850100 (12 bar (195 psi) option)

PART NO. : 6850000 (6.8 bar (100 psi) option)



PNEUMATIC (AIR)

PNEUMATIC BOLT STUNNER

>> Features



- Available in penetrating and non-penetrating models for cattle.
- Humane stunner will stun animal completely for better results.
- Easy handling for reduced operator fatigue.
- Simple to operate and maintain.
- Fast action for increased production.
- Improved meat quality.



13. kg (30 Lbs)



Air Pressure:
12 bar (195 psi) or
6.8 bar (100 psi)



SBN - 1

PART NO. : 6656000 - BEEF




>> Features


- Increases Blood Yield.
- Attaches to vacuum for blood collection.
- Stainless steel design.
- Blades easy to change.
- Available in two sizes for beef and pork.



0.46 kg (1 Lbs)



STIMULATING



OESOPHAGUS

KEST - 2

ELECTRIC STIMULATOR

PART NO. : 2021090



>> Features

- Stimulating transformer KEST-2 is built-in in a splash proof plastic housing and can provide a maximum tension of 48 V.

• Technical Data:

Line voltage: 115 V / 230 V

Stimulating voltage: 10...48 V

Frequency: 20...100 Hz

Stimulation periods: 15 sec./20 sec.

Stimulating equipment consists of:

- Stimulating transformer Type KEST-2
- Stimulating tongs Type KEST-Z
- Stimulating cable Type KEST-K

Use only these devices together!



Input Voltage
230 V - alternating current
Frequency: 50 - 60 Cycles

CLIP - B

K-CLIP-BEEF

PART NO. : 8896470 (CLIP)


PART NO. : 8896480 (BEEF RODDER)

>> Features

- Beef rodding tool is for application of beef clip to form a secure seal at the paunch that will not leak.
- The clip closes around the weasand and forces ingesta back into the paunch forming a tight, strong seal.



PORK

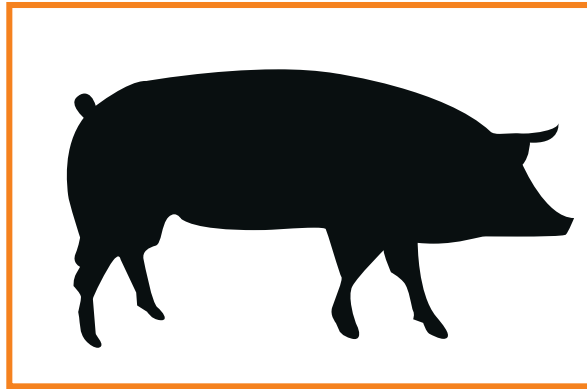



PORK





LEG

AHC-I

PART NO. : 6230000

CE Part No. :CE-6230000



90 mm (3.5")



Air Pressure:
6.8 bar (100 psi)




20 kg (44 Lbs)

PNEUMATIC (AIR)

AIR HOCK CUTTER

>> Features

- Simple design and easy to handle cutter for cutting beef and hog legs at the joint.
- Dual triggers and anti-tie-down for operator safety.
- Built with non-corrosive materials for cleanliness.



LEG

M-1

PART NO. : 6600000

CE Part No. :CE-6600000



40 mm (1.5")



Air Pressure:
6 bar (90 psi)



4 kg (9 Lbs)



Hydraulic Pressure:
100 bar (1500 psi)


HYDRAULIC HOCK CUTTER

- Lightweight, easy to handle and powerful sheep hock cutter.
- Can also be used for pork hock cutting operations.
- Dual trigger for operator safety, easy to keep clean and maintain.
- Blades can be turned and locked in the desired working position.
- Heavy duty blades made from the finest materials with knife like sharpness allow you to cut through the fleece of unskinned hocks with ease.

>> Power Unit

- HPP-III-A (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 2240 Watt (3 HP)
Oil Capacity: 15 Gallons
Flow: 3.0 GPM
- B-1 (Air-over-Oil)
Air Pressure Required: 6-7 bar (100 psi)
Oil Volume - output: 2.7 cu.in.
Hyd. Press. - output: 103 bar (1,500 psi)

PORK



MT - 40

PART NO. : 6630000
CE Part No. : CE-6630000



45 mm (1.75")



Air Pressure:
6 bar (90 psi)



4 kg (9 Lbs)



Hydraulic Pressure:
100 bar (1500 psi)

HYDRAULIC

HOG TOE NOTCHER

>> Features

- Lightweight and easy to use hog toe notcher.
- Fast cycle time for high production plants with dual triggers for operator safety.
- Built with stainless steel and non-corrosive materials.

>> Power Unit

- HPP-III-A (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 2240 Watt (3 HP)
Oil Capacity: 15 Gallons
Flow: 3.0 GPM
- B-1 (Air-over-Oil)
Air Pressure Required: 6-7 bar (100 psi)
Oil Volume - output: 2.7 cu.in.
Hyd. Press. - output: 103 bar (1,500 psi)

FEET



AMT - 40

PART NO. : 6631000



45 mm (1.75")



Air Pressure:
6.8 bar (100 psi)



7 kg (15 Lbs)

PNEUMATIC (AIR)

HOG TOE NOTCHER



>> Features

- Alight weight, fast, and easy to handle tool for removal of the web material, glands, and hair from between the hog's toes.
- Tool is made from stainless teel and corrosion resistant material for ease of cleaning and hygiene.
- Machine incorporates anti-tie down triggers for operator safety.

FEET



M - 5

PART NO. : 6606000
 CE Part No. : CE-6606000



100 mm (3.9")



Air Pressure:
6 bar (90 psi)



8.6 kg (19 Lbs)



Hydraulic Pressure:
100 bar (1500 psi)

HYDRAULIC


HOCK CUTTER

>> Features

- Powerful, fast and efficient hydraulic cutter with 3.9 inch (100 mm) blade opening for sheep neck cutting, for beef, and for pork hock cutting operations.
- A high-production tool that is compact and easy to maneuver for operator comfort.
- Constructed from stainless steel and non-corrosive materials for ease of cleaning and sanitation.

>> Power Unit

- HPP-III-A (Hydraulic Pump)
 Hydraulic Pressure: 103 bar (1,500 psi)
 Motor Horsepower: 2240 Watt (3 HP)
 Oil Capacity: 15 Gallons
 Flow: 3.0 GPM
- B-2 (Air-over-Oil)
 Air Pressure Required: 6-7 bar (100 psi)
 Oil Volume - output: 4.5 cu.in.
 Hyd. Press. - output: 103 bar (1,500 psi)



B - GUN

PART NO. : 6800000
 CE Part No. : CE-6800000



8 kg (18 Lbs)



Air Pressure:
6.8 bar (100 psi)



Motor Power:
1500 Watt (2.0 HP)
 Air Consumption:
1.2 m³ / min (42 CFM)



Blade diameter range:
50 mm - 75 mm
(2" - 3")

Blade speed:
3000 rpm



PNEUMATIC (AIR) BUNG GUN

>> Features

- Lightweight and easy to handle.
- One operator can cut up to 1,250 bungs per hour quickly and efficiently.
- Blade sizes available for obtaining highest yield.
- Blades are made from hardened stainless steel for durability and cleanliness.
- Please call us for information for a complete system, which includes a cyclone receiver, and the vacuum system, sterilizer for the bung gun and blade sharpening machine.



TURBO-III

PNEUMATIC (AIR) AIR DEHIDER

PART NO. : 6303000 (4 bar (60 psi) option)

PART NO. : 6303100 (6 bar (90 psi) option)



110 mm
(4.33") 100 mm (3.94")



1.24 kg (2 Lb 12 oz.s)



Air Pressure:
4 bar (60 psi)
6 bar (90 psi)



Blade speed:
6,000 - 8,500 rpm

>> Turbo-III

- Removes perfect hides faster with increased efficiency.
- Reduce vibration and weight for improved performance.
- Low maintenance cost, easy to keep clean and maintain.
- Blades are available in:
4.33" (110mm)
3.94" (100mm)
3.54" (90mm)
- Model A : operates with 90 PSI (6 bars) pressure
- Model B : operates with 60 PSI (4 bars) pressure



QUICK-SET

ELECTRIC DEHIDER BLADE SHARPENER AND CONDITIONER

PART NO. : 6310000



21 kg (46 Lbs)
Dimensions:
255 mm wide x 355 mm long x 255 mm high
(10" wide x 14" long x 10" high)



115 V / 230 V, 50/60 HZ
SINGLE PHASE MOTORS

>> Features

- Recondition dehider blades to like new condition, simple to set up and use. Index system positions each tooth for quick sharpening with cbn coated grinding wheel.
- Machine will sharpen 1.33" (110mm), 3.98" (100mm), and 3.54" (90mm) blades.



B - PLUG

BUNG PLUG - PORK, LAMB

PART NO. : 8896453 (BUNG PLUG)

PART NO. : 8896460 (RODDER)



>> Features

- Anal plug applicator tool is for easy insertion of anal plug into sheep, calves, lamb, and pigs to reduce fecal contamination.
- Applicator can be cleaned easily.



HC-IV

HYDRAULIC

PART NO. : 6540000

CE Part No. :CE-6540000

HOG HEAD DROPPER



>> Features

- Heavy-duty, fast and powerful machine with 1.5 second cycle time for cutting hog necks quickly and efficiently.
- Dual trigger and anti-tie down system for operator safety.
- Manufactured from stainless steel and non corrosive materials for ease of cleaning and sanitation.

>> Power Unit

- HPP-I-A (Hydraulic Pump)
Hydraulic Pressure: 138 bar (2,000 psi)
Motor Horsepower: 7460 Watt (10 HP)
Oil Capacity: 15 Gallons
Flow: 7.5 GPM
- HP-I (Air-over-Oil)
Air Pressure Required: 6 bar (90 psi)
Air volume per stroke: 2.5 cu.ft.
Hydraulic Pressure: 172 bar (2,500 psi)



230 mm (9")



Air Pressure:
6 bar (90 psi)



20 kg (45 Lbs)



Hydraulic Pressure:
138 bar (2000 psi)



HEAD, NECK

RNC - I

PART NO. : 6100000



150 mm (6")



Motor Power:
1500 Watt (2.0 HP)
Air Consumption:
1.55 m³ / min (55 CFM)



8.6 kg (19 Lbs)



Air Pressure:
6.8 bar (100 psi)

Blade speed:
1400 RPM

PNEUMATIC (AIR) HOG NECK CLEANER


>> Features

- Afast, efficient tool for removal and cleaning of blood clots formed in the neck area of hogs, tool incorporates water jet sprays for washing away loose particles and blood.
- One operator can handle up to 1200 hogs per hour.
- Heavy duty stainless steel construction for ease of cleaning and trouble free operation.

M - 6

PART NO. : 6608000

CE Part No. :CE-6608000

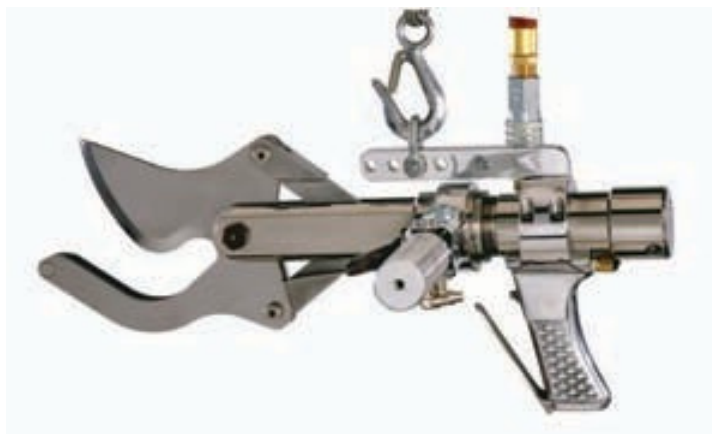

127 mm (5")



8 kg (18 Lbs)



Hydraulic Pressure;
100 bar (1500 psi)

HYDRAULIC

HOG AITCH-BONE CUTTER

>> Features

- High speed, efficient and easy to handle machine capable of handling up to 1,250 hogs per hour.
- Dual control triggers for operator safety and stainless steel hardened blades for a clean cut.
- Heavy duty construction for durability and trouble free service.

>> Power Unit

- HPP-III-A (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 2240 Watt (3 HP)
Oil Capacity: 15 Gallons
Flow: 3.0 GPM

AITCHBONE



BREASTBONE

E H B

PART NO. : 1000600



203 mm (8") Blade speed:
1400 RPM



23 kg (51 Lbs)



1120 Watt (1.5 HP) High Speed
42 V - 550 V, 50/60 HZ
3 PHASE MOTORS

ELECTRIC

HOG BRISKET SAW



>> Features

- High speed 2 H.P. electric saw capable of handling up to 1,200 hogs per hour.
- Special design blade guard with depth control eliminates miscuts and contamination.
- Easy to clean and maintain.



BREASTBONE

H K M - II

PART NO. : 6620000



11 kg (24 Lbs)



203 mm (8") Blade speed:
1200 RPM



Motor Power:
3730 Watt (5.0 HP)



Hydraulic Pressure:
138 bar (2000 psi)

HYDRAULIC

HOG BRISKET SAW



>> Features

- High speed, efficient and easy handling saw for high production plants.
- Handles up to 1,200 hogs per hour efficiently and with ease.
- Special design blade guide with depth control eliminates miscuts and contamination.

>> Power Unit

- HPP-II-C (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 3730 Watt (5 HP)
Oil Capacity: 15 Gallons
Flow: 7.5 GPM

PORK



BREASTBONE

A H B

PART NO. : 6002300

PNEUMATIC (AIR)

HOG BRISKET SAW



>> Features



- High speed, efficient and easy to handle saw for high production plants.
- Handles up to 1,200 hogs per hour.
- Dual trigger for operator safety, and adjustable handles for operator comfort.
- Special design guard with depth control to eliminate miscuts and contamination.
- Blade stops instantly when either trigger is released for safety.



11 kg (24 Lbs)



203 mm (8")
Blade speed:
1200 RPM



Air Pressure:
6.8 bar (100 psi)



Motor Power:
1500 Watt (2.0 HP)
Air Consumption:
1.2 m³ / min (42 CFM)



LEAF LARD

M - 8

PART NO. : 6609500

CE Part No. : CE-6609500

HYDRAULIC

LEAF LARD PULLER

>> Features



- A powerful, fast, and efficient tool for removal of blanket fat layer from inside the hog rib cage.
- Removes fat in one swift motion.
- Dual trigger for operator safety.
- Eliminates the stress of pulling the leaf lard by hand.
- Manufactured with stainless steel and non corrosive material for ease of cleaning and sanitation.

>> Power Unit

- HPP-III-A (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 2240 Watt (3 HP)
Oil Capacity: 15 Gallons
Flow: 3.0 GPM
- B-2 (Air-over-Oil)
Air Pressure Required: 6-7 bar (100 psi)
Oil Volume - output: 4.5 cu.in.
Hyd. Press. - output: 103 bar (1,500 psi)



90 mm (3.5")



Air Pressure:
6 bar (90 psi)



6 kg (13 Lbs)



Hydraulic Pressure:
100 bar (1500 psi)



BM - V - S D

ELECTRIC HOG AND BEEF SPLITTING SAW

PART NO. : 1708100 (ELECTRIC TRIGGERS)

PART NO. : 1708300 (AIR TRIGGERS)

CE Part No. : CE-1708100



Blade length;
2972 mm (117")

Cutting Distance (Guide opening):
483 mm (19")



79 kg (173 Lbs)



1500 Watt (2 HP) / 2240 Watt (3 HP)
42 V - 550 V, 50/60 HZ
1 PHASE / 3 PHASE MOTORS

- A high speed, powerful, and versatile beef and hog splitting saw especially designed for use by plants where both species are split.
- High torque 2 H.P. (3 H.P. Optional) electric motor and heavy-duty construction for trouble-free operation.
- Meets national and international requirements for sanitation and safety.
- Saw incorporates built-in hot water sterilization system for hygienic and sanitary operation.

>> Options

- Air switches
- Anti-Tie-Down

DIAMETER FRONT WHEEL: 216 mm (8.5")
DIAMETER REAR WHEEL: 305 mm (12")
BLADE TO BEAM: 255 mm (10")



BM - V - S D B

ELECTRIC HOG AND BEEF SPLITTING SAW

PART NO. : 1730000 (ELECTRIC TRIGGERS)

PART NO. : 1731000 (AIR TRIGGERS)

CE Part No. : CE-1730000



Blade length;
2896 mm (114")

Cutting Distance (Guide opening):
483 mm (19")



76 kg (167 Lbs)



1150 Watt (2.0 HP)
42 V - 550 V, 50/60 HZ
1 PHASE / 3 PHASE MOTORS

- A hog splitting saw capable of splitting up to 600 hogs and sows per hour.
- High torque 2 H.P. (3 H.P. Optional) electric motor and heavy-duty construction for trouble-free operation.
- Meets national and international requirements for sanitation and safety.
- Saw incorporates built-in hot water sterilization system for hygienic and sanitary operation.

>> Options

- Air switches
- Anti-Tie-Down

DIAMETER FRONT WHEEL: 178 mm (7")
DIAMETER REAR WHEEL: 305 mm (12")
BLADE TO BEAM: 229 mm (9")



K M - 160

PART NO. : 1600400 (MECHANICAL BRAKE)

PART NO. : 1600510 (ELECTRICAL BRAKE)

CE Part No. : CE-1600410



407 mm (16")

Blade speed:
1100 RPM



58 kg (127 Lbs)



2240 Watt (3 HP)
42 V - 550 V, 50/60 HZ
3 PHASE MOTORS

ELECTRIC HOG SPLITTING SAW

- A heavy-duty, easy handling, fast and efficient hog splitting saw capable of splitting up to 750 hogs per hours.
- Heavy-duty, high torque, totally sealed motor for hygienic and sanitary operation.
- Built-in safety brake for safety.
- 16-inch diameter saw blade for all size hogs and sows.

>> Options

- 160-JBA
Anti-Tie-Down

>> Brake Options

- 160-JB
Mechanical Brake - Internal
- 160-JI
Electrical Brake - External

K M - 210

PART NO. : 1600450 (MECHANICAL BRAKE)

PART NO. : 1600520 (ELECTRICAL BRAKE)

CE Part No. : CE-1600550



521 mm (20.5")

Blade speed:
1000 RPM



65 kg (142 Lbs)



3730 Watt (5 HP)
42 V - 550 V, 50/60 HZ
3 PHASE MOTORS

ELECTRIC HOG SPLITTING SAW

- High speed, powerful hog splitting saw with 5 H.P. high torque totally enclosed motor for high production splitting of hogs and sows.
- Heavy-duty, high torque, totally sealed motor for hygienic and sanitary operation.
- Built-in safety brake for safety.
- Built-in water spray system for hygienic and sanitary operation.
- 20.5-inch diameter saw blade for all size hogs and sows.

>> Options

- 210-JBA
Anti-Tie-Down

>> Brake Options

- 210-JB
Mechanical Brake - Internal
- 210-JI
Electrical Brake - External



BREAKING

77

PART NO. : 6001600

PNEUMATIC (AIR)

MULTI PURPOSE BONE SAW



>> Features

- A powerful, light weight machine that is easy to maneuver for pork and beef breaking operations.
- 2 horse power motor and 110 mm (4.5") dept of cut for primal cutting of forequarters, hindquarters, chucks, shoulders, briskets, and pork ham marking and breaking.



10 kg (23 Lbs)



203 mm (8") thru
305 mm (12")



Air Pressure:
6.8 bar (100 psi)



Motor Power:

1500 Watt (2.0 HP)

Air Consumption:

1.2 m³ / min (42 CFM)

Blade speed:

1200 RPM

PORK



BREAKING

SUPER SPEED

PART NO. : 1000200

ELECTRIC

PRIMAL BEEF BREAKING SAW



>> Features

- Heavy-Duty 2 H.P. breaking saw, ideal for cutting forequarter, hindquarter and other cuts of beef and pork.
- Saw rotates within the suspension hanger to any desired angle with ease.
- Waterproof dual controls for operator safety.



203 mm (8") thru
305 mm (12")

Blade speed:
1400 RPM



21 kg (46 Lbs)



1120 Watt (1.5 HP) High Speed
42 V - 550 V, 50/60 HZ
3 PHASE MOTORS



SC-550

PART NO. : 6210000

PNEUMATIC (AIR)

PORK SCRIBE SAW



>> Features

- Lightweight, heavy duty tool for accurate scribing of pork without bone splinters and miscuts.
- Designed for on-the-rail or table operations.
- For up to 1,500 pork sides per hour.
- Can cut through tough bone quickly for greater productivity with ease.
- Machine incorporates an adjustable stainless steel depth gauge for accurate control of depth of cut.
- Constructed from high quality materials, stainless steel and heat treated aluminum for durability, ease of cleaning, sanitary operation and reduced maintenance cost.



2.7 kg (6 Lbs)



140 mm (5.5")



Air Pressure:
6 bar (90 psi)



Motor Power:

672 Watt (0.9 HP)

Air Consumption:

0.85 m³ / min (30 CFM)

Blade speed:

1950 RPM

BREAKING

PORK



SC-650

PART NO. : 6220000

PNEUMATIC (AIR)

BREAKING SAW, RIB-BONE



>> Features

- A fast, versatile multi-purpose saw designed for a variety of beef and pork operations.
- Saw is light weight and fast with high torque.
- Stops instantly when trigger is released.
- Incorporates adjustable stainless steel depth gauge for accurate control of depth of cut to 2 inches (51mm).



3 kg (6.6 Lbs)



165 mm (6.5")



Air Pressure:
6 bar (90 psi)



Motor Power:

672 Watt (0.9 HP)

Air Consumption:

0.85 m³ / min (30 CFM)

Blade speed:

1950 RPM

BREAKING

HYDRAULIC

HSC-650

PART NO. : 6220100

BREAKING SAW, RIB - BONE



>> Features

- A powerfull, fast multi-purpose saw designed for a variety of beef and pork operations.
- Hydraulic system allows high speed and high torque combined with a light weight and easy to handle saw to cut through tough bones.
- Easy to clean and maintain, machine incorporates adjustable stainless steel depth gauge for accurate control of depth of cut.



Blade speed:
2200 RPM



Motor Power:
2984 Watt (4.0 HP)



3.2 kg (7 Lbs)



165 mm (6.5")



Hydraulic Pressure:
100 bar (1500 psi)

>> Power Unit

- HPP-II-B (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 3730 Watt (5 HP)
Oil Capacity: 15 Gallons
Flow: 4.0 GPM

BREAKING

PORK

HSC-800

PART NO. : 6222000

HYDRAULIC BREAKING SAW CHINE, LOINS, SHORT RIBS



>> Features

- A powerfull, fast multi-purpose saw designed for a variety of beef and pork operations.
- Hydraulic system allows high speed and high torque combined with a light weight and easy to handle saw to cut through tough bones.
- Machine incorporates an 8 inch diameter saw blade with adjustable stainless steel depth gauge for accurate control of depth of cut.



Blade speed:
2200 RPM



Motor Power:
2984 Watt (4.0 HP)



3.6 kg (8 Lbs)



203 mm (8")



Hydraulic Pressure:
100 bar (1500 psi)

>> Power Unit

- HPP-II-B (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 3730 Watt (5 HP)
Oil Capacity: 15 Gallons
Flow: 4.0 GPM

BREAKING



CHINE

ELECTRIC CHINE SAW - COLT HORIZONTAL BREAKING SAW

PART NO. : 1002200
CE Part No. : CE-1002200



203 mm (8") and
229 mm (9")

Blade speed:
4500 RPM



7.7 kg (17 Lbs)



2090 Watt (2.8 HP)
115/230 V, 50/60 HZ
1 PHASE MOTORS

>> Features

- Alightweight, single phase electric saw that is extremely fast and powerful for pork chinning operation.
- Easy to handle and compact for operator comfort.

BREAKING



COLT

ELECTRIC CIRCULAR BREAKING SAW

PART NO. : 1001600
CE Part No. : CE-1001600



203 mm (8") thru
255 mm (10")

Blade speed:
4500 RPM



7.7 kg (17 Lbs)



2090 Watt (2.8 HP)
115/230 V, 50/60 HZ
1 PHASE MOTORS

>> Features

- Alight weight saw that can be used without a balancer, for a variety of operations.
- Combination of high speed and high power for cutting tough, hard bones with ease.
- Heavy duty single phase motor combined with precision worm gear for durability and ease of maintenance.
- Avaliable with depth gauge for control of depth of cut.

BREAKING



ZIP SAW

PART NO. : 1900000



Blade length;
203 mm (8")
406 mm (16")



8.2 kg (18 Lbs)



1000 Watt (1.3 HP)
115/230 V, 50/60 HZ
1 PHASE MOTORS

ELECTRIC

RECIPROCATING BREAKING SAW



>> Features

- Electric powered reciprocating saw for breaking operations for beef and pork. Counter balanced drive system for reduced noise and vibration.
- Lightweight combined with high speed makes an ideal machine for cutting of forequarters, brisket opening, primal cuts and general purpose applications.
- Counter balanced drive system for reduced noise and vibration.



K - 9

PART NO. : 1910000



Blade length;
203 mm (8")
406 mm (16")



9.7 kg (21.5 Lbs)



1500 Watt (2 HP)
115/230 V, 50/60 HZ
1 PHASE MOTORS

ELECTRIC

RECIPROCATING BREAKING SAW



>> Features

- A heavy-duty, light weight reciprocating saw for use on production breaking lines and general all around cutting.
- 2H.P. motor enables saw to cut through hard bones with ease. Maneuverable for cutting in any angle and ideal for cutting forequarters, primal cuts, chucks, shoulder and other beef and pork cutting operations. Double insulated motor for operator safety.



TG - 32

TG - 48

OFFAL PROCESSOR TRIPE WASHER AND REFINER

PART NO. : 1130000 (TG-32)

PART NO. : 1140000 (TG-48)



>> Features

- Pivoting dome opens automatically.
- All stainless steel construction.
- reduced clean-up time.
- Easy to inspect.
- Reduced maintenance cost.
- Reduced water usage.
- USDA approved.

>> Capacity:

TG-32 Washer and Refiner

- The TG-32 handles approximately 150 lbs of any product.
- Beef:
Tongues, tails, cheekmeat, tendons, feet, tripe, honeycomb and ommassum.
- Pork:
Hearts, bungs, ears, snouts, feet, stomachs, tongues and intestines.
- Lamb:
Stomachs, feet and heads.

TG-48 Washer and Refiner

- Beef:
250-275 paunches per hour.
300 ommassum per hour.
150 - 160 head per hour both products.

>> TG-32 Specification

- Water Inlet: 1" requires minimum 16GPM @60 psi
- Drain outlet 4" NPT



Dim: 30" wide x 63" long x 51" high.
Approx wt 1300 lbs.



5600 Watt (7.5 HP)
230/460 V, 50/60 HZ
3 PHASE MOTORS

>> TG-48 Specification

- Water Inlet: 1" requires minimum 24GPM @60 psi
- Drain outlet 4" NPT



Dim: 63" wide x 96" long x 96" high.
Approx wt. 1700 lbs.



18650 Watt (25 HP)
230/460 V, 50/60 HZ
3 PHASE MOTORS



AIC - I

PART NO. : 1160000



Approx wt 50 lbs.

>> Power Unit

- HPP-II-C (Hydraulic Pump)
Hydraulic Pressure: 138 bar (2,000 psi)
Motor Horsepower: 3730 Watt (5 HP)
Oil Capacity: 15 Gallons
Flow: 7.5 GPM

HYDRAULIC

AUTOMATIC INTESTINE CUTTER

>> Features

- All Stainless Steel Construction.
- USDA approved.
- Built in control allows adjustment in product length.
- Innovative Quick-change blade design.
- Reduces labor.
- Hydraulic driven with air safety control.
- Utilizing your employees in the most efficient manner possible and having up to three employees cutting intestines to length is not the best use of their time. Kentmaster Mfg. introduces the solution to that problem with the model AIC-1 automatic intestine cutter. This compact unit takes the place of the personnel at the discharge end of your intestine splitting machine, allowing you to utilize them in a more efficient and profitable way.
- Handles approximately 500 head per hour.
- Can be attached to Automatic Intestine Splitter and Flusher or ran separately.
- Dim: 12" wide x 20" long x 24" high.

KSS - 1

PART NO. : 1170000



>> Power Unit

- HPP-II-C (Hydraulic Pump)
Hydraulic Pressure: 138 bar (2,000 psi)
Motor Horsepower: 3730 Watt (5 HP)
Oil Capacity: 15 Gallons
Flow: 7.5 GPM

HYDRAULIC

PORK STOMACH SPLITTER

>> Features

- All Stainless Steel Construction.
- USDA approved.
- Unique Design reduces water usage.
- Eliminates further pre-wash before scalding.
- Hydraulic Drive System eliminates electrical problems.
- Meets OSHA safety standard.
- Because of the KSS-1's unique internal design, water usage is reduced by up to 60% when compared with most other stomach splitters on the market. The KSS-1 produces a cleaner product, eliminating the need to further pre-wash the stomach before the scalding process.
- Automatically opens the stomach and flushes out the contents.
- Rated over 1100 head per hour.



Dim: 24" wide x 66" long x 34" high.
Approx wt 300 lbs.



AISC-I

PART NO. : 1180000

AUTOMATIC INTESTINE SPLITTER AND CLEANER



>> Features

- All Stainless Steel Construction.
- Safety E-stop controls with top cover engaged safety switches.
- Specially designed spray system and baffles reduces product damage.
- Ergonomically designed to relief operator fatigue.
- Produces cleaner product with higher yields.
- Reduces Re-work.
- Separate Hydraulic Power Units.
- Complete Systems Available Including Auto-Intestine Cutter and TG-32 Offal Washer.
- Hydraulic Power Unit HPP-IV-A, 10 HP.

>> Automatic Intestine Splitter and Cleaner

The Kentmaster Automatic Intestine Cleaning Machine is designed to split and clean the intestines without damage to the product. The product is fed onto feed rods and then conveyed through a cabinet. A series of specially designed sprayers and baffles gently flush and clean the product. This reduces product damage and increases yields. The machine has two separate hydraulic powered conveyors and cutter blades. The machine has built-in safety controls. The machine is easy to clean and maintain.



159 kg (350 Lbs)

>> Power Unit

- HPP-IV-A (Hydraulic Pump)
Hydraulic Pressure: 138 bar (2,000 psi)
Motor Horsepower: 7460 Watt (10 HP)
Oil Capacity: 15 Gallons
Flow: 8.0 GPM



JBT - I

PART NO. : 6650000

AUTOMATIC PORK HEAD TABLE JAWBONE AND SNOOT PULLER



>> Features

- All Stainless Steel Construction.
- Ergonomically designed for the operator.
- Safety Features – E-Stop, air switches in safety shields and operator stop, forward and reverse controls.
- Can be used with Central Hydraulic System or Individual Power Pack.
- Increased Yield and reduced Product Re-work.
- Reduces Labor.
- Reduces broken jawbones and broken teeth.
- Widely accepted as the Best Machine Available in 11 major plants.

>> Automatic Pork Head Table

Kentmaster Manufacturing was the industry leader in developing the automatic jawbone/snout puller for pork heads. This machine reduces operator fatigue, increases yields, reduces product re-work and is much safer than traditional machines used in the past. The special designed jaw removal system un-hinges the jawbone to increase temple meat yields and eliminates broken jawbones. The machine is rated at 750 hogs per hour. The unit is constructed of stainless steel and is hydraulically powered with air controls.



500 kg (1100 Lbs)

>> Power Unit

- HPP-II-G (Hydraulic Pump)
 - Hydraulic Pressure: 103 bar (1,000 psi)
 - Motor Horsepower: 3730 Watt (5 HP)
 - Oil Capacity: 15 Gallons
 - Flow: 4.0 GPM



HEAD PROCESSING

BST - I

PART NO. : 1151000



Pump Capacity:
20 Gal / min - Single Table
29 Gal / min - Double Table



193 kg (425 Lbs)



Air Pressure:
6 bar (90 psi)



Hydraulic Pressure:
70 bar (1000 psi)

BOAR AND SOW HEAD TABLE CHISEL AND JAWBONE PULLER

>> Features

- Reduces Operator Stress and Injury.
- Increase Yield Due To Reduced operator Fatigue.
- Hydraulically Powered With Air Control.
- All Stainless Steel Construction.
- USDA Approved.
- Used by Major Packers in USA.
- Complete System Designed to Meet Your Needs.
- Rated to 250 Head per Hour.
- Adjustable Operator Stand.
- Consistent Product Quality.
- Can be used to only pull jawbones.
- Cheekmeat Puller option available.



VACUUM

VACUUM MULTIPLE DROP VACUUM



Multiple Drop Vacuum System

>> Multiple Drop Vacuum System

Multiple Drop Vacuum Systems from Kentmaster are custom designed to meet your specific needs. We have many systems for carcass vacuums, spinal cord removal, brain removal and many other applications. We have many systems in operation for over 10 years. We look forward to designing a system to meet your needs. Kentmaster was the industry leader in developing and providing this technology to the meat industry.

>> Multiple Drop Vacuum System Features

- Custom designed systems to meet your needs.
- Multiple wands for spinal cord and brain removal and carcass vacuums.
- Double Dump Valve available.
- Great flexibility for layout installation.
- Easier to maintain and monitor.



VACUUM

VAC-SAN

CARCASS CLEANING SYSTEM STEAM-HOT WATER-VACUUM

PART NO. : 6005000 (WATER AND STEAM)

PART NO. : 6005100 (STEAM ONLY)



>> Carcass Cleaning System

The Kentmaster Vac-San I for carcass cleaning was one of the most revolutionary breakthroughs in the meat industry. This system was designed to remove visible contamination without trimming thus reducing product damage and increasing yields. This USDA approved and patented process is used in meat plants throughout the world to produce a cleaner and more wholesome product. Units are available with steam/hot water, steam only and water only.

>> Features

- Removes contamination without trimming.
- Increase yields.
- USDA tested and approved.
- Variety of wands available to choose from.
- Can be used with chemical.



PORK



KCS - 1

PART NO. : 2021000



>> Features

- Made for large slaughter capacity.
- Processor controlled for an optimised stunning course in order to reduce slaughter damages at the carcass.
- Individual stunning parameter adjustment.
- 16 different stunning programs for different animals and animal sizes.
- Monitoring of stunning parameters, strength of electric current and minimum stunning procedure relative to animals protection.
- Combined stunning of brain and cardiac by means of stunning tongs possible.
- Dimensions 580 x 350 x 250 mm

>> Head to Back

PART NO. : 2021060



11.5 kg (25 Lbs)



Input Voltage
220/230 V

STUNNING

PORK



KEC - 21

PART NO. : 2021020



>> Features

- Designed for smaller killing rates.
- Monitoring of stunning parameters, strength of electric current and minimum stunning procedure relative to animals protection.
- Voltmeter
- Amp Meter
- Stunning voltage 250 V - 350 V switch
- Dimensions 340 x 375 x 210 mm
- Power 300 Watt



15.0 kg (33 Lbs)



Input Voltage
220/230 V

STUNNING



KLC - 1

PART NO. : 2021010



9 kg (20 Lbs)



Input Voltage
220/230 V

STUNNING TRANSFORMER Constant Voltage



>> Features

- Made for medium slaughter capacity.
- Processor controlled for an optimized stunning in order to reduce slaughter damages at the carcass.
- Combined stunning of brain and cardiac by means of stunning tongs possible.
- Dimensions 380 x 340 x 190 mm

TONGS

STUNNING TONGS, FORKS, HEAD TO BACK



Stunnet Tong
KZK-1

Stunnet Tong
KZ-3

Stunnet Fork

Head to Back



>> Stunnet Tongs - KZ3

PART NO. : 2021030

- Aluminum arms.
- Lightweight but robust design.
- Dimensions 750 x 270 mm
- Weight 2.8 kg

>> Stunnet Tongs - KZK-1

PART NO. : 2021050

- Made of plastic.
- Water resistant.

>> Stunnet Fork


PART NO. : 2021040

- For stunning in a restrainer or a stunning cabinet.
- Fixed or movable (pneumatic) version.

>> Head to Back

PART NO. : 2021060

- Works with Electronic Stunner KCS-1 (Constant Amperage).



D H B - 1

PART NO. : 8896430



DEHAIRING BEATERS

>> Features

- The base plate and its inner reinforcement are made of very special materials. As a result the base plate is very sustainable in practice. The 3 scrapers and 2 cases in the clamping holes are made of a hygienic Stainless Steel. The clamping holes can be supplied in all necessary mutual and distance dimensions and diameters. In order to achieve the best dehairing result, Dehairing Paddles are supplied in 2 types:
- Shore 65 ° for diagonal dehairing machines
- Harder type Shore 80 ° for continuous tunnel machines

It is very important that the type of dehairing paddle is passed on in the order. The sustainability of the Dehairing Paddles promotes this very much. The dehairing result can be called excellent.

DEHAIRING



S B N - 2

PART NO. : 6656200 - PORK



BLEEDING KNIFE - PORK

>> Features

- Increases Blood Yield.
- Attaches to vacuum for blood collection.
- Stainless steel design.
- Blades easy to change.
- Available in two sizes for beef and pork.



0.46 kg (1 Lbs)

STICKING




Tel (956) 369-0129



Email: ventas@marekpartssupply.com

Web: marekpartssupply.com

SHEEP

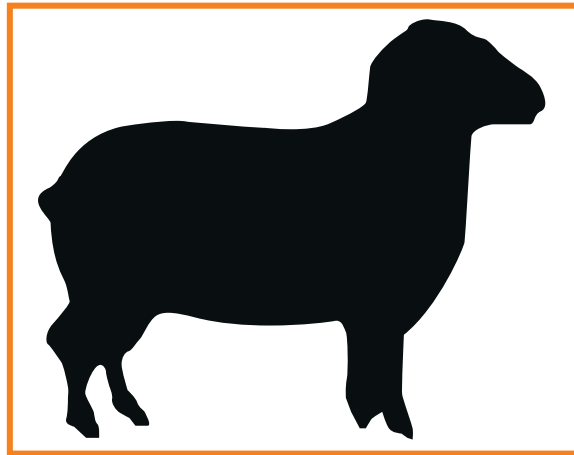

SHEEP



HORN

M - 9

PART NO. : 6608600

CE Part No. :CE-6608600



84 mm x 127 mm wide
(3.3" x 5")



8 kg (18 Lbs)



Hydraulic Pressure;
100 bar (1500 psi)

HYDRAULIC


SHEEP HORN CUTTER

>> Features

- Powerful machine for high production plants.
- Can remove horns of sheep and goat efficiently.
- Easy to handle and maneuver for operator comfort.
- Stainless steel construction.

>> Power Unit

- HPP-III-A (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 2240 Watt (3 HP)
Oil Capacity: 15 Gallons
Flow: 3.0 GPM
- B-2 (Air-over-Oil)
Air Pressure Required: 6-7 bar (100 psi)
Oil Volume - output: 4.5 cu.in.
Hyd. Press. - output: 103 bar (1,500 psi)



LEG

M - 1

PART NO. : 6600000

CE Part No. :CE-6600000



40 mm (1.5")



4 kg (9 Lbs)



Air Pressure:
6 bar (90 psi)



Hydraulic Pressure:
100 bar (1500 psi)

HYDRAULIC
HOCK CUTTER

- Lightweight, easy to handle and powerful sheep hock cutter.
- Can also be used for pork hock cutting operations.
- Dual trigger for operator safety, easy to keep clean and maintain.
- Blades can be turned and locked in the desired working position.
- Heavy duty blades made from the finest materials with knife like sharpness allow you to cut through the fleece of unskinned hocks with ease.

>> Power Unit

- HPP-III-A (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 2240 Watt (3 HP)
Oil Capacity: 15 Gallons
Flow: 3.0 GPM
- B-1 (Air-over-Oil)
Air Pressure Required: 6-7 bar (100 psi)
Oil Volume - output: 2.7 cu.in.
Hyd. Press. - output: 103 bar (1,500 psi)

SHEEP



HEAD, NECK

M - 5

PART NO. : 6606000
C€ Part No. : CE-6606000



100 mm (3.9")



Air Pressure:
6 bar (90 psi)



8.6 kg (19 Lbs)



Hydraulic Pressure:
100 bar (1500 psi)

HYDRAULIC

NECK CUTTER

>> Features

- Powerful, fast and efficient hydraulic cutter with 3.9 inch (100 mm) blade opening for sheep neck cutting, for beef, and for pork hock cutting operations.
- A high-production tool that is compact and easy to maneuver for operator comfort.
- Constructed from stainless steel and non-corrosive materials for ease of cleaning and sanitation.

>> Power Unit

- HPP-III-A (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 2240 Watt (3 HP)
Oil Capacity: 15 Gallons
Flow: 3.0 GPM
- B-2 (Air-over-Oil)
Air Pressure Required: 6-7 bar (100 psi)
Oil Volume - output: 4.5 cu.in.
Hyd. Press. - output: 103 bar (1,500 psi)



BREASTBONE

SBS - II

PART NO. : 6240500
C€ Part No. : CE-6240500



14 kg (31 Lbs)



Blade cutting length;
330 mm (13")



Blade opening:
153 mm (6")



Hydraulic Pressure;
100 bar (1500 psi)

HYDRAULIC

SHEEP BRISKET SAW

>> Features

- Lightweight and easy to use, can cut sheep briskets quickly with one clean sweep.
- High speed, efficient with dual trigger for operator safety and comfort.
- Hydraulic cylinders provides the power required to shear, mutton lamb and veal quickly and less effort.

>> Power Unit

- HPP-III-A (Hydraulic Pump)
Hydraulic Pressure: 103 bar (1,500 psi)
Motor Horsepower: 2240 Watt (3 HP)
Oil Capacity: 15 Gallons
Flow: 3.0 GPM
- B-1 (Air-over-Oil)
Air Pressure Required: 6-7 bar (100 psi)
Oil Volume - output: 2.7 cu.in.
Hyd. Press. - output: 103 bar (1,500 psi)



ZIP SAW

PART NO. : 1900000



Blade length;
203 mm (8")
406 mm (16")



8.2 kg (18 Lbs)



1000 Watt (1.3 HP)
115/230 V, 50/60 HZ
1 PHASE MOTORS

ELECTRIC

RECIPROCATING BREAKING SAW



>> Features

- Electric powered reciprocating saw for breaking operations for beef and pork. Counter balanced drive system for reduced noise and vibration.
- Lightweight combined with high speed makes an ideal machine for cutting of forequarters, brisket opening, primal cuts and general purpose applications.
- Counter balanced drive system for reduced noise and vibration.



K - 9

PART NO. : 1910000



Blade length;
203 mm (8")
406 mm (16")



9.7 kg (21.5 Lbs)



1500 Watt (2 HP)
115/230 V, 50/60 HZ
1 PHASE MOTORS

ELECTRIC

RECIPROCATING BREAKING SAW



>> Features

- A heavy-duty, light weight reciprocating saw for use on production breaking lines and general all around cutting.
- 2H.P. motor enables saw to cut through hard bones with ease. Maneuverable for cutting in any angle and ideal for cutting forequarters, primal cuts, chucks, shoulder and other beef and pork cutting operations. Double insulated motor for operator safety.



TURBO-III

PNEUMATIC (AIR) AIR DEHIDER

PART NO. : 6303000 (4 bar (60 psi) option)

PART NO. : 6303100 (6 bar (90 psi) option)



110 mm
(4.33") 100
mm (3.94")



1.24 kg (2 Lb 12 oz.s)



Air Pressure:
4 bar (60 psi)
6 bar (90 psi)



Blade speed:
6,000 - 8,500 rpm

>> Turbo-III

- Removes perfect hides faster with increased efficiency.
- Reduce vibration and weight for improved performance.
- Low maintenance cost, easy to keep clean and maintain.
- Blades are available in:
4.33" (110mm)
3.94" (100mm)
3.54" (90mm)
- Model A : operates with 90 PSI (6 bars) pressure
- Model B : operates with 60 PSI (4 bars) pressure



QUICK-SET

ELECTRIC DEHIDER BLADE SHARPENER AND CONDITIONER

PART NO. : 6310000



21 kg (46 Lbs)
Dimensions:
255 mm wide x 355 mm long x 255 mm high
(10" wide x 14" long x 10" high)



115 V / 230 V, 50/60 HZ
SINGLE PHASE MOTORS

>> Features

- Recondition dehider blades to like new condition, simple to set up and use. Index system positions each tooth for quick sharpening with cbn coated grinding wheel.
- Machine will sharpen 1.33" (110mm), 3.98" (100mm), and 3.54" (90mm) blades.



OESOPHAGUS

CLIP - L

K-CLIP-LAMB

PART NO. : 8896490 (CLIP)

PART NO. : 8896500 (LAMB RODDER)



>> Features

- Lamb rodding tool is for application of lamb clip to form a secure seal at the paunch that will not leak.
- The clip closes around the weasand and forces ingesta back into the paunch forming a tight, strong seal.
- Can be used on sheep, goats, deer, and lamb.

SHEEP



VACUUM

VACUUM

MULTIPLE DROP VACUUM



Multiple Drop Vacuum System

>> Multiple Drop Vacuum System

Multiple Drop Vacuum Systems from Kentmaster are custom designed to meet your specific needs. We have many systems for carcass vacuums, spinal cord removal, brain removal and many other applications. We have many systems in operation for over 10 years. We look forward to designing a system to meet your needs. Kentmaster was the industry leader in developing and providing this technology to the meat industry.

>> Multiple Drop Vacuum System Features

- Custom designed systems to meet your needs.
Multiple wands for spinal cord and brain removal and carcass vacuums.
- Double Dump Valve available.
- Great flexibility for layout installation.
- Easier to maintain and monitor.



VAC-SAN

CARCASS CLEANING SYSTEM STEAM-HOT WATER-VACUUM

PART NO. : 6005000 (WATER AND STEAM)

PART NO. : 6005100 (STEAM ONLY)



>> Carcass Cleaning System

The Kentmaster Vac-San I for carcass cleaning was one of the most revolutionary breakthroughs in the meat industry. This system was designed to remove visible contamination without trimming thus reducing product damage and increasing yields. This USDA approved and patented process is used in meat plants throughout the world to produce a cleaner and more wholesome product. Units are available with steam/hot water, steam only and water only.

>> Features

- Removes contamination without trimming.
- Increase yields.
- USDA tested and approved.
- Variety of wands available to choose from.
- Can be used with chemical.





TG - 32

TG - 48

OFFAL PROCESSOR TRIPE WASHER AND REFINER

PART NO. : 1130000 (TG-32)

PART NO. : 1140000 (TG-48)



>> Features

- Pivoting dome opens automatically.
- All stainless steel construction.
- reduced clean-up time.
- Easy to inspect.
- Reduced maintenance cost.
- Reduced water usage.
- USDA approved.

>> Capacity:

TG-32 Washer and Refiner

- The TG-32 handles approximately 150 lbs of any product.
- Beef:
Tongues, tails, cheekmeat, tendons, feet, tripe, honeycomb and ommassum.
- Pork:
Hearts, bungs, ears, snouts, feet, stomachs, tongues and intestines.
- Lamb:
Stomachs, feet and heads.

TG-48 Washer and Refiner

- Beef:
250-275 paunches per hour.
300 ommassum per hour.
150 - 160 head per hour both products.

>> TG-32 Specification

- Water Inlet: 1" requires minimum 16GPM @60 psi
- Drain outlet 4" NPT



Dim: 30" wide x 63" long x 51" high.
Approx wt 1300 lbs.



5600 Watt (7.5 HP)
230/460 V, 50/60 HZ
3 PHASE MOTORS

>> TG-48 Specification

- Water Inlet: 1" requires minimum 24GPM @60 psi
- Drain outlet 4" NPT



Dim: 63" wide x 96" long x 96" high.
Approx wt. 1700 lbs.



18650 Watt (25 HP)
230/460 V, 50/60 HZ
3 PHASE MOTORS



STUNNING

KCS - 1

PART NO. : 2021000



11.5 kg (25 Lbs)



Input Voltage
220/230 V



>> Features

- Made for large slaughter capacity.
- Processor controlled for an optimised stunning course in order to reduce slaughter damages at the carcass.
- Individual stunning parameter adjustment.
- 16 different stunning programs for different animals and animal sizes.
- Monitoring of stunning parameters, strength of electric current and minimum stunning procedure relative to animals protection.
- Combined stunning of brain and cardiac by means of stunning tongs possible.
- Dimensions 580 x 350 x 250 mm

>> Head to Back

PART NO. : 2021060

SHEEP



STUNNING

KEC - 21

PART NO. : 2021020



15.0 kg (33 Lbs)



Input Voltage
220/230 V



>> Features

- Designed for smaller killing rates.
- Monitoring of stunning parameters, strength of electric current and minimum stunning procedure relative to animals protection.
- Voltmeter
- Amp Meter
- Stunning voltage 250 V - 350 V switch
- Dimensions 340 x 375 x 210 mm
- Power 300 Watt



KLC - 1

PART NO. : 2021010



>> Features

- Made for medium slaughter capacity.
- Processor controlled for an optimised stunning course in order to reduce slaughter damages at the carcass.
- Combined stunning of brain and cardiac by means of stunning tongs possible.
- Dimensions 380 x 340 x 190 mm



9 kg (20 Lbs)



Input Voltage
220/230 V

TONGS

STUNNING TONGS, FORKS, HEAD TO BACK



Stunnet Tong
KZK-1

Stunnet Tong
KZ-3

Stunnet Fork

Head to Back



>> Stunnet Tongs - KZ3

PART NO. : 2021030

- Aluminum arms.
- Lightweight but robust design.
- Dimensions 750 x 270 mm
- Weight 2.8 kg

>> Stunnet Tongs - KZK-1

PART NO. : 2021050

- Made of plastic.
- Water resistant.

>> Stunnet Fork

PART NO. : 2021040

- For stunning in a restrainer or a stunning trap.
- Fixed or movable (pneumatic) version.

>> Head to Back

PART NO. : 2021060

- Works with Electronic Stunner KCS-1 (Constant Amperage).



DRIVE ALLY

KK AWE

PART NO. : 2021100



Caoxer with extension pole

ELECTRIC CAOXR (PRODDER)



>> Features

- Robust design.
- Steam jet proof.
- Electronic control, no mechanical attrition.
- Type KKAWE 21 according to the new national and European regulations concerning animal protection during stunning procedure and transport.
- Suited for accumulator.
- Optical indicator.
- Electronic maintenance free.
- Higher capacity.

SHEEP




RECTUM

B - PLUG

PART NO. : 8896453 (BUNG PLUG)

PART NO. : 8896460 (RODDER)

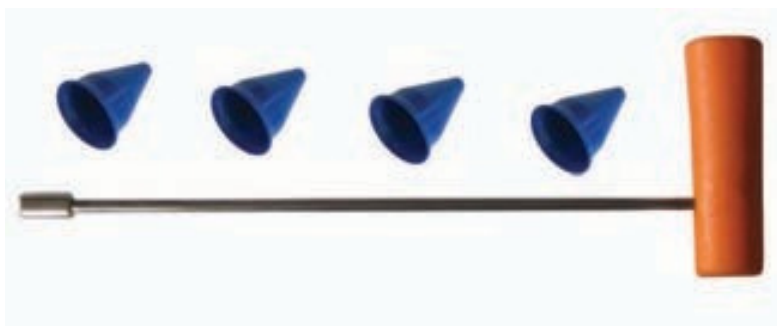

BUNG PLUG - PORK, LAMB

>> Features

- Anal plug applicator tool is for easy insertion of anal plug into sheep, calves, lamb, and pigs to reduce fecal contamination.
- Applicator can be cleaned easily.



Tel (956) 369-0129

Email: ventas@marekpartssupply.com

Web: marekpartssupply.com

ACCESSORIES

HPP-I

HYDRO POWER PACK, 10 HP



>> Features

- Designed for efficiency and quiet operation with the finest quality components for years of trouble free operation.
- Stainless steel oil reservoir for best hygiene and ease of cleaning.
- 10 HP Motor
- 7.5 GPM Pump (HPP-1-A)
- 7.8 GPM Pump (HPP-1-B)
- 2000 psi
- 15 Gal Oil Tank
- Air controlled with air or electric valves
- Anti tie down control option available
- Dimensions:
915 mm L x 585 mm W x 686 mm H
(36" L x 23" W x 27" H)



100 - 111 kg
(220 - 244 Lbs)



7460 Watt (10 HP)
208/230/380/416/460 V, 50/60 HZ
3 PHASE MOTORS

HPP-II

HYDRO POWER PACK, 5 HP



>> Features

- Designed for efficiency and quiet operation with the finest quality components for years of trouble free operation.
- Stainless steel oil reservoir for best hygiene and ease of cleaning.
- 5HP Motor
- 4 GPM Pump Standard
- 7 GPM Pump Optional (HPP-2-C)
- 1500 psi
- 15 Gal Oil Tank
- Air controlled with air or electric valves
- Anti tie down control option available
- Dimensions:
915 mm L x 585 mm W x 560 mm H
(36" L x 23" W x 22" H)



59 - 75 kg
(130 - 165 Lbs)



3730 Watt (5HP)
208/230/380/416/460 V, 50/60 HZ
3 PHASE MOTORS

HPP - III

HYDRO POWER PACK, 3 HP



>> Features

- Designed for efficiency and quiet operation with the finest quality components for years of trouble free operation.
- Stainless steel oil reservoir for best hygiene and ease of cleaning.
- 3HP Motor
- 3.0 GPM Pump
- 1500 psi
- 10 Gal Oil Tank
- Air controlled with air or electric valves
- Anti tie down control option available
- Dimensions:
483 mm L x 432 mm W x 712 mm H
(19" L x 17" W x 28" H)



53 kg
(116 Lbs)



2240 Watt (3 HP)
208/230/380/416/460 V, 50/60 HZ
3 PHASE MOTORS

B - 1, B - 2

BOOSTER AIR OVER OIL

PART NO. : 6610000 (B-1)

PART NO. : 6610050 (B-2)



- Specially designed air-over-oil intensifier for activation of small hydraulic tools.
- Stainless steel enclosure for best hygiene and ease of cleaning.

>> B-1 (Air-over-Oil)

- Air Pressure Required: 6-7 bar (100 psi)
- Oil Volume - output: 2.7 cu.in.
- Hyd. Press. - output: 103 bar (1,500 psi)
- Dimensions:
280 mm L x 380 mm W x 585 mm H
(11" L x 15" W x 23" H)

>> B-2 (Air-over-Oil)

- Air Pressure Required: 6-7 bar (100 psi)
- Oil Volume - output: 4.5 cu.in.
- Hyd. Press. - output: 103 bar (1,500 psi)
- Dimensions:
280 mm L x 380 mm W x 585 mm H
(11" L x 15" W x 23" H)



B-1
21.5 kg (47 Lbs)



B-2
23 kg (50 Lbs)

HP-I & II INTENSIFIER AIR OVER OIL

PART NO. : 6513010 (HP-I)

PART NO. : 6523010 (HP-II)



- Heavy duty air-over-oil intensifier, for use with hydraulic tools.
- Simple design with few moving parts for years of trouble free service.

>> HP-I (Air-over-Oil)

- Air Pressure Required: 6 bar (90 psi)
- Air volume per stroke: 2.5 cu.ft.
- Hydraulic Pressure: 172 bar (2,500 psi)

>> HP-II (Air-over-Oil)

- Air Pressure Required: 6 bar (90 psi)
- Air volume per stroke: 3.72 cu.ft.
- Hydraulic Pressure: 233 bar (3,385 psi)



>> HP-I (Air-over-Oil)

Dimensions:

152 mm wide x 152 mm long x 2032 mm high
(6" wide x 6" long x 80" high)

Approx wt 63 kg (139 lbs.)



>> HP-II (Air-over-Oil)

Dimensions:

228 mm wide x 228 mm long x 1220 mm high
(9" wide x 9" long x 48" high)

Approx wt. 116 kg (255 lbs.)



Magnetic Starter

- Remote control switch for use in activation of electric tools.
- Unit contains coil, overload relays and contractors in an enclosure.
- Magnetic starters are available in stock for all electric operated machines in all voltages and amperages.



Inverter (Electronic Brake)

- Allows equipment to ramp up to full speed and ramp down to stop.
- Reduces gear and bearing wear.
- Reduces equipment maintenance and repair.
- Relieves operator stress from sudden starting and stopping.



Transformers

- Quality built transformers combined with magnetic start switch for transformation of all voltages. Please call for your requirement.



Air In-Line Heater

- An electric operated heating device used to heat compressed air as it travels to and operates an air tool in the cooler. The warm compressed air heats the tool to eliminate icing up of the tool motor and also increases operator comfort.



Air Filter, Regulator, Oiler

- For use with pneumatic tool to filter the compressed air, regulate the air pressure to the required level and oiler to lubricate the compressed air. Various models are available according to the tool's volume requirement.



Service

- Kentmaster service engineers are available to assist you with your questions or problems.
- Call 1-800-421-1477 to contact our west coast plant located in California or call 1-800-367-3181 to contact our Omaha, Nebraska facility.



Circular Blades

- Kentmaster stocks a variety of stainless steel and alloy steel circular blades with a variety of tooth design and thickness to suit the kentmaster circular saw it manufactures.



Reciprocating Blades

- Available at kentmaster: Reciprocating blades manufactured from heat treated carbon and alloy steel for best performance in all sizes.



Dehider Blades

- Kentmaster stocks the finest quality dehider blades made from heat treated tool steel for best performance.



Bandsaw Blades

- Kentmaster stocks bandsaw blades made from the finest quality swedish steel to fit all model splitting saws.



ACCESSORIES

HOSES



Vacuum Hoses

- We stock a variety of high quality vacuum hoses for the machines we manufacture, which operate with vacuum systems. Hoses are available in various lengths.



Air Hoses

- We stock air hoses to suit all model pneumatic machines manufactured by Kentmaster Mfg. Co., Inc.



Hydraulic Hoses

- We stock hydraulic hoses to suit all model hydraulic machines manufactured by Kentmaster Mfg. Co., Inc.



Water Hoses

- We stock water hoses to suit all model machines, which require water to operate properly.

Balancer


BALANCERS



- Kentmaster stocks a wide range of the finest quality balancers in a variety of weight and cable travel ranges. Balancers are easy to install and simple to adjust and use. Parts are available in stock for fast delivery.

>> Balancer Options

Part No.	Capacity	Travel
7100200	4-9 lbs (2-4 kg) 9-13 lbs	8.2 ft. (2,500 mm)
7100210	(4-6 kg) 13-18 lbs (6-8	8.2 ft. (2,500 mm)
7100220	kg) 18-22 lbs (8-10 kg)	8.2 ft. (2,500 mm)
7100230	22-30 lbs (10-14 kg) 22-	8.2 ft. (2,500 mm)
7100240	33 lbs (10-15 kg) 33-44	8.2 ft. (2,500 mm)
7100300	lbs (15-20 kg) 44-55 lbs	6.5 ft. (2,000 mm)
7100310	(20-25 kg) 55-66 lbs (25-	6.5 ft. (2,000 mm)
7100320	30 kg) 66-77 lbs (30-35	6.5 ft. (2,000 mm)
7100330	kg) 77-99 lbs (35-45 kg)	6.5 ft. (2,000 mm)
7100340	44-66 lbs (30-40 kg) 66-	6.5 ft. (2,000 mm)
7100350	88 lbs (20-30 kg) 88-110	6.5 ft. (2,000 mm)
7100400	lbs (40-50 kg) 110-132	8.2 ft. (2,500 mm)
7100410	lbs (50-60 kg) 132-154	8.2 ft. (2,500 mm)
7100420	lbs (60-70 kg) 154-176	8.2 ft. (2,500 mm)
7100430	lbs (70-80 kg) 176-198	8.2 ft. (2,500 mm)
7100440	lbs (80-90 kg) 198-220	8.2 ft. (2,500 mm)
7100450	lbs (90-100 kg) 88-110	8.2 ft. (2,500 mm)
7100460	lbs (40-50 kg) 110-132	8.2 ft. (2,500 mm)
7100470	lbs (50-60 kg) 132-154	8.2 ft. (2,500 mm)
7100500	lbs (60-70 kg) 154-176	9.85 ft. (3,000 mm)
7100510	lbs (70-80 kg) 176-220	9.85 ft. (3,000 mm)
7100520	lbs (80-100 kg) 220-250	9.85 ft. (3,000 mm)
7100530	lbs (100-115 kg)	9.85 ft. (3,000 mm)
7100540		9.85 ft. (3,000 mm)
7100550		9.85 ft. (3,000 mm)

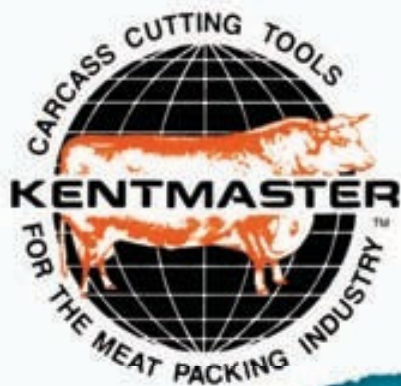

Kentmaster Manufacturing Co., Inc.

1801 South Mountain Avenue | Monrovia
California 91016 USA

Ph: +1-626-359-8888 | Fax: +1-626-303-5151
<http://www.kentmaster.com>



Locations in: Australia, Brazil, Ireland, New Zealand, South Africa, United Kingdom, United States

Kentmaster Equipment (Aust) PTY.LTD.

Unit #2 / 24 Central Court Browns Plains
Queens Land 4118 Australia Telephone: +
(61) 07 3806-8400 Fax: +61 07 3806-7933
Australia@Kentmaster.com

Kentmaster do Brasil, Ltda.

Av. Dr. Joao Teodoro No. 805
Bairro De Vila Rezende
13405-240 Piracicaba, SP,
Brazil
Telephone #1: +55 019 3 413-3113
Telephone #2: +55 019 983-4973
Fax: +55 019 3 413 3113
Brazil@Kentmaster.com

Kentmaster (IRL) LTD.

Benamore, Dublin Road.
Roscrea,
CO, Tipperary,
Ireland
Telephone: +353 0505-23292
Fax: +353 0505-23299
Ireland@Kentmaster.com

Kentmaster Equipment (NZ) LTD.

Unit #1 / 88 Ford Road Onekawa Napier
New Zealand Telephone #1: +64 6 835-
2471 Fax: +64 6 877-7858
NewZealand@Kentmaster.com

Kentmaster South Africa (PTY) LTD.

Johannesburg - S. Africa
Unit 54 Sunnyrock Park
Sunrock Close, Germiston
South Africa
Telephone: +27 11-455-3748
Fax: +27 11-455-3749
SouthAfrica@Kentmaster.com

Kentmaster (UK) LTD.

Unit 301 Hartlebury Trading Estate
Hartlebury
Worcestershire DY10 4JB
England
Telephone #1: +44 07831-304-687
Telephone #2: +44 07768-933-858
UK@Kentmaster.com

Kentmaster Mfg. Co., Inc.

1801 South Mountain Ave.
Monrovia, CA, 91016
USA
Telephone #1: +1 626 359-8888
Telephone #2: (800) 421-1477
Fax: +1 626 303-5151
info@Kentmaster.com

Kentmaster Omaha

4417 South 139th Street
Omaha, NE, 68137
USA
Telephone #1: +1 402 896-3355
Telephone #2: (800) 367-3181
Fax: +1 402 896-3311
Omaha@Kentmaster.com